



C-TRL-26R1
Supersedes C-TRL-26
Updated February 2 2026

E. D. ETNYRE & CO.

CONFIDENTIAL

Prices are subject to change without notice

TRAILER PRICE LIST

Effective February 1, 2026

1333 S. Daysville Road, Oregon, IL 61061
Phone: 815-732-2116/
800-995-2116
Email: sales@etnyre.com
Website: www.etnyre.com

INDEX

General Information.....	1
RTN - Hydraulic Removable Gooseneck	
35 Ton (RTN35TD).....	2-7
35 Ton Paver Special (RTN35TD-PS).....	8-13
55 Ton LIMITED (RTN55LTD3).....	14-19
55 Ton ~Evenly Distributed~ (RTN55ETD3).....	20-25
55 Ton Paver Special - Evenly Distributed (RTN55ETD3-PS).....	26-31
55 Ton (RTN55TD3).....	32-37
55 Ton (RTN55TD3-PS).....	38-43
60 Ton (RTN60TD3).....	44-49
60 Ton Paver Special (RTN60TD3-PS).....	50-55
 Paver Special - Rear Loading Paver Special - <i>Fixed Gooseneck, Rear Loading</i>	
35 Ton (R35TL-PS).....	56-59
50 Ton (R50TL-PS).....	60-63
 SR Series - Super Ramp - <i>Fixed Gooseneck, Rear Loading</i>	
35 Ton (SR35TL).....	64-67
50 Ton (SR50TL3).....	68-71
 MRG Series - Mechanical Removable Gooseneck, <i>Front Loading</i>	
30 & 35 Ton (MRG30/35TD).....	72-79
 Jeep Dollies	
60 Ton ~ Tandem Axle (GHD60T).....	80-82
75 Ton ~ Tridem Axle (GHD75T3).....	84-86
 Truck Tractor Data	
Tandem Axle Dimensions.....	87
Tridem Axle Dimensions.....	88

All Prices F.O.B. Oregon, Illinois U.S. Dollars All prices subject to change without notice	PRICE LIST GENERAL INFORMATION
---	---

**THE FOLLOWING INFORMATION SHOULD BE SUPPLIED
WHEN ORDERING AN ETNYRE TRAILER**

Model	Type of Brakes (air, electric, etc.)
Capacity	Type of wheels (disc or cast spoke)
Gooseneck radius	Include truck dimension sheet
Fifth wheel height (standard or special)	Customer's name, address and telephone number
Platform length	Manner of payments - (export dealers only)
Platform height (level or drop platform)	Import license - (export dealers only)
Tire size	

Domestic sales are subject to Federal Excise Tax. This tax must be paid on all sales to the Federal Government. State and political sub-divisions not subject to tax must supply tax exemption certificates. **There are *no* Federal Excise Taxes included in this price list (see information below).**

Orders accepted by Etnyre are accepted with the understanding that the order is not subject to cancellation unless Etnyre is reimbursed for material and labor which have been applied against it. A revision or order once accepted by Etnyre will not be recognized unless such revision is submitted in writing and agreed to by Etnyre.

Other sizes and types of trailers are available upon special order. Prices upon request.

All price list dimensions, tires sizes, standard and optional equipment are correct in the price list and take precedence over the catalog specification sheet. All specifications are subject to change without notice.

All platform heights and clearances shown on price list sheets are approximate loaded heights and clearances have taken into consideration tire and frame deflection of the trailer under fully rated load.

Trailer weights on price list sheets are approximate and subject to tolerance of plus or minus 5%.

EXCISE TAX INFORMATION

Effective April 1, 1983, you as a trailer dealer were made responsible for the collection and remittance of Federal Excise Tax. All trailers with a Gross Vehicle Weight Rating (GVWR) over 26,000# (ie. 10 ton ramp type tag-a-longs are not subject to excise tax) are subject to this tax unless sold to a tax exempt customer.

- Federal Excise Tax is 12% of the fair market value of the trailer sold.
- The fair market price is your selling price to the customer including your preparation charges.
- You may deduct the Federal Excise Tax paid on the tires from the 12% tax. The Federal Excise Tax paid on standard size tires are shown on price list C-TRE-01. This rule is due to the trailer manufacturer already having paid the tax on the tires.
- The tax is not based on the trade difference if a trade is involved but on the full delivered fair market value of the new trailer.
- Any local or state sales tax must be shown as a separate item or they will be subject to Federal Excise Tax.

Price Sheet No. C-RTN35-25 Effective October 1, 2025


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

CUSTOM RTN SERIES
HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS
35 Ton
(in any 16'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 35 tons in any 16'-0" of deck
Hydraulic Removable Gooseneck
High lift gooseneck (35" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Main frame - 4 beam - 16" fully cambered
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
Deck width - 8'-6" (102")
Crossmember spacing - 24"
Decking - 1 1/2" Apitong (open center)
Decking securement - deck screws
Front folding ramps - steel w/traction bars
Outriggers - 12" swinging/removable w/double hook-on at front
Half front bolsters with traction bars
Load bearing bolsters between axles (drop style)
Load bearing half bolsters at rear (drop style)
Boom well (full length including rear half bolster)
Chain slots and flag holders in bolsters
Ridewell air suspension

± 3" adjustable ride height
Manual exhaust valve
Tires - 255/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 22,500# (5/8" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes (2S/2M)
Brakes - 16 1/2" x 7" air
Spring brakes - one (1) axle (rear axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber L.E.D. strobes in 3rd tail light position, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 12 total (4 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)
Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer

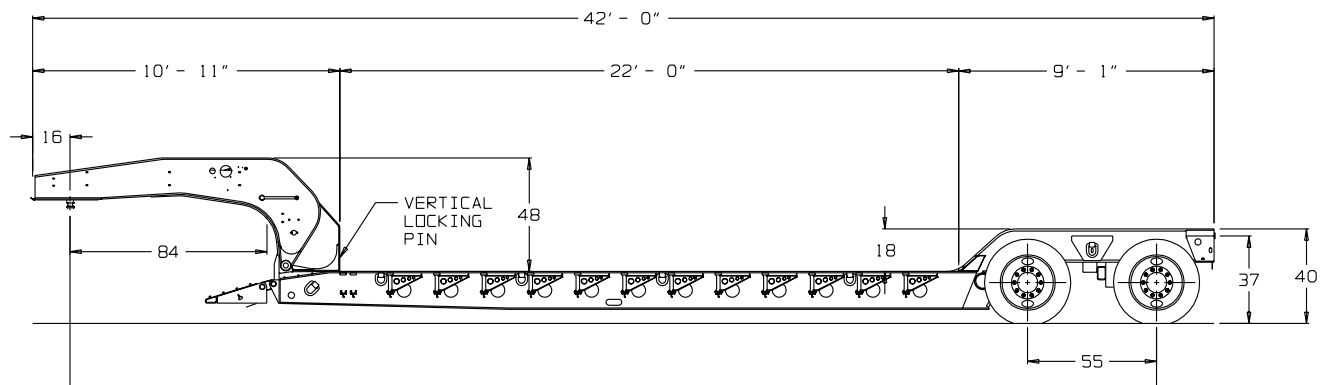

Model
RTN35TD

Capacity
35 Tons

Deck
22' Level

Axles
2

Tire Size
255/70R22.5 (H)

Weight (lbs) 14,000lbs.

35 tons (RTN35TD)		List Price	Est. Wgt
	Base Price	\$75,504.00	14,000
X	Tons Capacity - 35 tons in any 16'	\$0.00	0
	Tons capacity - 35 tons in any 10'	\$1,200.00	500
X	Construction - (4) I-Beam, cambered, T-1 steel		0
	Construction - (2) I-Beam, cambered, T-1 steel	-\$4,100.00	-1,900
	Custom/Paver Special - Tapered front beams (8/3/8" deep)	\$2,000.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,760.00	590
	Platform width - 10'-0"	\$2,660.00	1,090
X	Platform length - 22'-0"	\$0.00	0
	Platform length - 24'-0"	\$1,540.00	590
	Platform length - 26'-0"	\$3,080.00	1,180
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
	Platform Height/Road Clearance - 18"/6" (Adjustable)	\$3,500.00	1,500
	Platform Height/Road Clearance - 20"/6" (Adjustable)	\$2,350.00	700
X	Crossmembers on 24" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,210.00	330
	Auxiliary crossmembers full width between crossmembers	\$1,650.00	440
	Crossmembers on 20" centers	\$450.00	200
X	Front folding ramps - steel with traction bars	\$0.00	0
	Front fixed ramps - 12" steel with traction bars	\$1.00	0
	Front folding ramps - 41" long wood filled, adjustable (only with paver special beams)	\$0.00	0
X	Top flange reinforcement	\$0.00	0
	Top flange reinforcement - outside of outer beams only	\$680.00	235
X	Bucket trough - none	\$0.00	0
	Bucket trough - last 3 crossmembers of deck	\$1,000.00	325
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542

	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20
	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 96"	\$650.00	150
	Swing clearance - 108"	\$1,260.00	400
	Swing clearance - 108" & 84	\$1,675.00	550
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	1/8" aluminum top cover over gooseneck area - omit	-\$150.00	-60
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100

	Center hook-on ramps - 31" long, wood filled, aluminum (not to be used with tapered beams)	\$1,130.00	170
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck (can be used tapered beams)	\$2,540.00	200
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
X	Spring brakes on 2nd axle	\$0.00	0
	Spring brakes on 1st and 2nd axle	\$235.00	30
X	Axles - (2) 22,500# 5/8" wall w/ 20,000# brakes and limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all axles	\$850.00	10
	Dust shields (per axle)	\$70.00	20
	Cam saver tubes (per axle)	\$300.00	60
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (8) 255/70R22.5 (H)	\$0.00	0
	Tires - (8) 275/70R22.5 (H) (per axle)	\$385.00	90
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$670.00	300

	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Manual exhaust valve	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Amber L.E.D. strobes in 3rd tail light position w/ switch	\$0.00	0
X	Battery back-up with rechargeable feature	\$0.00	0
X	Lash rings - (12) total, 4-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - 12" swinging/removable with double hook-on front. Full length of deck	\$0.00	0
	Extension brackets (outriggers) - weldments only	-\$500.00	-270
	Outrigger planks - 2" x 10" oak with spring tie downs	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (outside of main beams only)	\$0.00	0
	Decking - 1 1/2" Apitong (full width)	\$650.00	300
	Decking securement with carriage bolts and floor clips	\$595.00	60
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0

	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Boomwell - open bottom w/ extra low 1st crossmember (no cover plate)	\$0.00	0
	Boomwell - open bottom w/ extra low 1st crossmember (bolt-in cover plate)	\$385.00	50
X	Traction bars on front and & rear slopes	\$0.00	0
X	Chain hooks & flag holders slots on bolsters	\$0.00	0
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
	Additional Equipment		
	Wheel well covers - 1/4" floorplate, one piece over tires only, bolt-on	\$2,800.00	860
	Wheel well covers - 1/4" floorplate, humpy bumpy over tires only, bolt-on	\$2,800.00	860
	Wheel well covers - 1/2" floorplate, one piece over tires only, bolt-on	\$3,400.00	1,180
	Wheel well covers - 1/2" floorplate, humpy bumpy over tires only, bolt-on	\$3,400.00	1,180
	Wheel well covers - plastic, individual over tires only, bolt-on	\$1,400.00	200
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$325.00	120

Price Sheet No. C-RTN3500-PS-25 Effective October 1, 2025

All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

**CUSTOM
PAVER SPECIAL SERIES
PS3500 "BLACKHAWK"**


HYDRAULIC REMOVABLE GOOSENECK
FRONT LOADING TRAILERS

35 Ton
(in any 16'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 35 tons in any 16'-0" of deck
Hydraulic Removable Gooseneck
High lift gooseneck (35" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Main frame - 4 beam - 16" fully cambered
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
8'-6" (102") Deck width
Crossmember spacing - 20"
Decking - 1 1/2" Apitong (full width)
Decking securement - deck screws
Front Folding Ramps - 41" adjustable width (wood filled)
Outriggers - none (weldments included for later installation of outriggers)
Tapered front beams (8 3/8" deep)
3:1 sloped deck (18°) covered with 1 1/2" Apitong
Full width rear deck covered with 1 1/2" Apitong
Top flange reinforcement (outside main beams only)
4" high roller stop at rear of trailer, width of main beam

Flag holders in bolsters
Ridewell air suspension
± 3" Adjustable ride height
Manual exhaust valve
Tires - 255/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 22,500# (5/8" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes (2S/2M)
Brakes - 16 1/2" x 7" air
Spring Brakes - one (1) axle (rear axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber LED strobes in 3rd tail light, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 12 total (4 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)
Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer

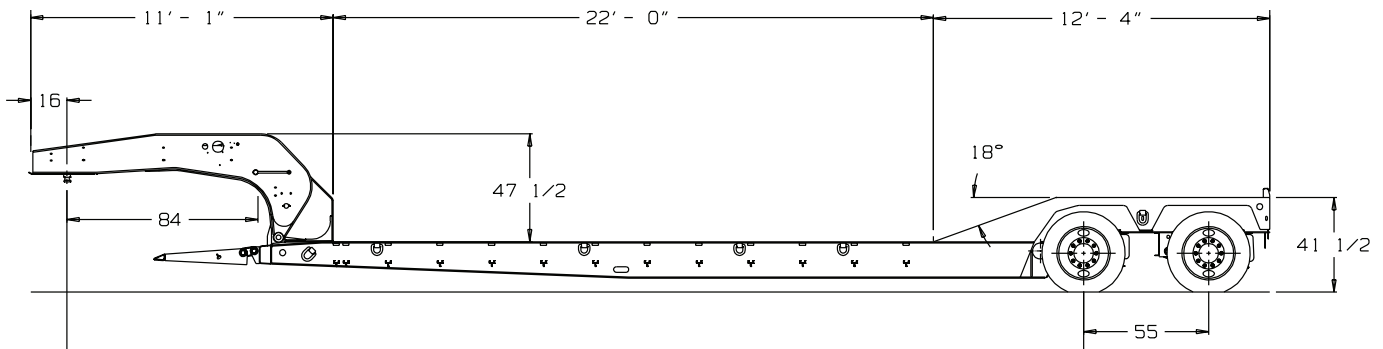

Model
RTN35TD-PS

Capacity
35 Tons

Deck
22' Level

Axles
2

Tire Size
255/70R22.5 (H)

Weight (lbs.)
14,980lbs.

35 tons (RTN35TD-PS)		List Price	Est Wgt
X	Base Price	\$81,848.00	14,980
X	Tons Capacity - 35 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
X	Custom/paver special - tapered front beams (8-3/8" deep)	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,760.00	590
	Platform width - 10'-0"	\$2,660.00	1,090
X	Platform length - 22'-0"	\$0.00	0
	Platform length - 24'-0"	\$1,540.00	590
	Platform length - 26'-0"	\$3,080.00	1,180
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,210.00	300
	Auxiliary crossmembers full width between crossmembers	\$1,650.00	440
	Crossmembers on 24" centers	\$0.00	-200
X	Front folding ramps - 41" long wood filled, adjustable	\$0.00	0
X	Bucket trough -None	\$0.00	0
	Bucket trough - last 3 crossmembers of deck	\$1,000.00	325
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542
	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20

	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 96"	\$650.00	150
	Swing clearance - 108"	\$1,260.00	700
	Swing clearance - 108" & 84"	\$1,675.00	860
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck.	\$2,540.00	200
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
X	Spring brakes on 2nd axle	\$0.00	0
	Spring brakes on 1st and 2nd axle	\$235.00	30

X	Axles - (2) 22,500# 5/8" wall w/ 20,000# brakes and limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all axles	\$850.00	10
	Dust shields on all axles (per axle)	\$70.00	20
	Cam saver tubes on both axles	\$600.00	120
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (8) 255/70R22.5 (H)	\$0.00	0
	Tires - (8) 275/70R22.5 (H)	\$770.00	180
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$670.00	300
	Liquid filled air gauge with chart (only available with open boomwell)	\$150.00	10
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Manual exhaust valve	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Battery back-up - amber strobe lights on battery back-up	\$0.00	0
X	3rd taillight package - amber L.E.D. strobe warning lamps	\$0.00	0

X	Lash rings - (12) total, 4-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - none (weldments only)	\$0.00	0
	Extension brackets (outriggers) -12" swinging/removable outriggers (without outrigger planks). Includes 12" double hook-on outriggers at front of deck. Full length of deck	\$960.00	270
	Outrigger planks - 2" x 10" oak with spring tie downs (only with decking outside main beams only)	\$530.00	470
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	470
	Outrigger planks - 2" x 10" apitong with spring tie downs (only with decking outside main beams only)	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (full width)	\$0.00	0
	Decking - 1 1/2" Apitong (outside main beams only)	-\$250.00	-300
	Decking securement with carriage bolts and floor clips	\$880.00	60
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Flag holder slots in bolsters	\$0.00	0
X	Rear deck - full width-wood covered, 1 1/2" apitong	\$0.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (no cover plate)	\$1,800.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (bolt-in cover plate)	\$2,185.00	50
X	Rear slope (main to rear deck) - 3 to 1 (18 degree) with full width decking	\$0.00	0

	Rear slope (main to rear deck) 3 to 1 (18 degree) with open center	\$0.00	0
X	Roller stop at rear - 4" high, width of main beams	\$0.00	0
	Roller stop at rear - omit	-\$100.00	-15
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
	Additional Equipment		
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120

Price Sheet No. C-RTN-LTD-25, Effective October 1, 2025

All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

**CUSTOM
BLACKHAWK "LIMITED"**

**HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS**


55 Ton

Evenly distributed over entire deck length

STANDARD FEATURES AND EQUIPMENT

Load capacity - 55 tons distributed over
entire deck length
- 50 tons in any 16'-0" of deck
Hydraulic Removable Gooseneck
High lift gooseneck
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 84"
Fifth wheel height - 50" (adjustable 5-position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Main frame - 4 beam - 16" fully cambered
Deck height - 22"
Ground clearance - 6"
Deck width - 8'-6" (102")
Crossmember spacing - 24"
Decking - 1 1/2" Apitong (open center)
Decking securement - deck screws
Outriggers - 12" heavy duty swinging/removable
Load bearing bolsters between axles
Load bearing half bolsters at rear
Boomwell
Ridewell air suspension

±3 Adjustable ride height
Tires - (12)255/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 22,500# (5/8" wall thickness) with oil bearings
Axle spacing - 55"
Anti-lock brakes - none (trailer exceeds 120,000# GVWR)
Brakes - 16 1/2" x 7" full air
Spring brakes on 2nd axle
Automatic slack adjusters
Lighting - L.E.D. type - sealed beam - rubber mounted -
mid turn signal
Amber L.E.D. strobes in 3rd tail light position, with
battery and rechargeable feature
Finish - shot blast/epoxy primer/2-part urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 16 total (6 each side)
(1 each full bolster end)
Mud Flaps
Red and white conspicuity markings
Paint - Black
Flag holder w/thumb screws at front of deck and rear of
trailer

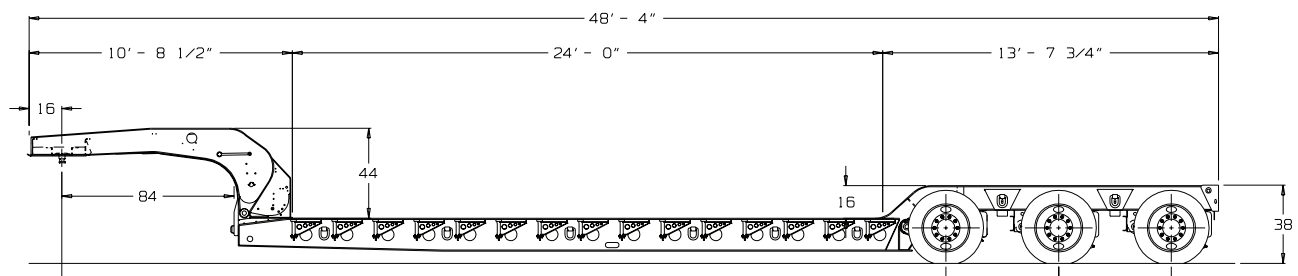

Model
RTN55LTD3

Capacity
55 Tons
Distributed
(50 tons in 16')

Tire Size
255/70R22.5 (H)

Deck
24' Level

Axles
3

Weight(lbs.)
20,290lbs.

5055 tons limited (RTN55LTD3)		List Price	Est Wgt
X	Base Price	\$96,456.00	20,290
X	Tons Capacity - 55 tons distributed over entire deck length/ 50 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,850.00	680
X	Platform length - 24'-0"	\$0.00	0
	Platform length - 26'-0"	\$1,600.00	490
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
X	Crossmembers on 24" centers	\$0.00	0
X	Front folding ramps - none	-\$1,000.00	-470
	Front folding ramps - steel with tractions bars	\$0.00	0
	Front fixed ramps - 12" steel with traction bars	\$0.00	0
X	Frame reinforcement - none	-\$750.00	-250
X	Top flange reinforcement - none	-\$1,000.00	-500
X	Bucket trough - none	-\$500.00	-325
	Bucket trough - last 3 crossmembers of deck	\$0.00	325
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
X	Gooseneck support cylinder - hydraulic	\$0.00	0

X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 90" (MAX)	\$575.00	75
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
X	1/8" aluminum top cover over gooseneck area - none	-\$385.00	-60
	1/8" aluminum top cover over gooseneck area	\$0.00	60
	Gooseneck Additional Equipment	\$0.00	0
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on 2nd axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 22,500# 5/8" wall	\$0.00	0
	Tire inflation system - P.S.I. on all axles	\$1,275.00	15
	Dust shields on all axles	\$210.00	60
	Cam saver tubes on all axles (per axle)	\$300.00	60
	Hubodometer on driver side of 1st axle	\$100.00	10
	Limited chains	\$400.00	10

X	Tires - (12) 255/70R22.5 (H)	\$0.00	0
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - No air lift 3rd axle	-\$1,000.00	-300
	Suspension - air lift 3rd axle only	\$0.00	300
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Manual exhaust valve - none	-\$300.00	-10
	Manual exhaust valve	\$0.00	10
	Raising and lowering valve	\$500.00	10
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Amber L.E.D. strobes in 3rd tail light position w/ switch	\$0.00	0
X	Battery back-up with rechargeable feature	\$0.00	0
X	Lash rings - (16) total, 6-per side, bent style, 1-each bolster end flat style	-\$90.00	-10

	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets (outriggers) - 12" swinging/removable without double hook-on outriggers at front of deck. Full length of deck	-\$275.00	-40
	Extension brackets (outriggers) - weldments only	-\$500.00	-270
	Outrigger planks - 2" x 10" oak with spring tie downs	\$530.00	470
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	470
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
	Double hook-on outriggers at front of deck	\$275.00	40
X	Decking - 1 1/2" Apitong (outside of main beams only)	\$0.00	0
	Decking - 1 1/2" Apitong (full width)	\$800.00	300
	Decking securement with carriage bolts and floor clips	\$360.00	60
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Boomwell - open bottom (no extra low 1st crossmembers) with no cover plate	\$0.00	0
	Boomwell - open bottom (no extra low 1st crossmembers) with bolt-in cover plate	\$385.00	50
X	Traction bars on front slope	\$0.00	0
	Rear section transition ramp - steel with traction bars (need with wheel well covers)	\$750.00	120
X	Chain hooks & flag holders slots on bolsters	\$0.00	0
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0

	Additional Equipment		
	Wheel well covers - 1/4" floorplate, one piece over tires only, bolt-on	\$4,200.00	1290
	Wheel well covers - 1/4" floorplate, humpy bumpy over tires only, bolt-on	\$4,200.00	1290
	Wheel well covers - 1/2" floorplate, one piece over tires only, bolt-on	\$5,100.00	1770
	Wheel well covers - 1/2" floorplate, humpy bumpy over tires only, bolt-on	\$5,100.00	1770
	Wheel well covers - plastic, individual over tires only, bolt-on	\$2,100.00	300
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

CUSTOM RTN SERIES
HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS

55 Ton
Distributed over entire deck length
50 ton in any 16'

STANDARD FEATURES AND EQUIPMENT

- | | |
|---|---|
| <p>Load capacity - 55 tons distributed over entire deck length
- 50 tons in any 16'-0" of deck with close coupled 4th axle</p> <p>Hydraulic Removable Gooseneck
High lift gooseneck (35" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Frame reinforced - Close Couple 4th Axle only.
Main frame - 4 beam - 16" fully cambered
Top flange reinforcement (full length ... outside flanges only)
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
Deck width - 8'-6" (102")
Crossmember spacing - 20"
Decking - 1 1/2" Apitong (open center)
Decking securement - deck screws
Front folding ramps - steel w/ traction bars
Outriggers - 12" swinging/removable w/double hook-on at front
Bucket trough at rear of deck (covered with steel plate)
Extra low 1st crossmember in rear bridge
Half front bolsters with traction bars
Load bearing bolsters between axles (drop style)
Load bearing half bolsters at rear (drop style)
Boom well (full length including rear half bolster) (fully open / no cover)</p> | <p>Chain slots and flag holders in bolsters
Ridewell air suspension
±3" Adjustable ride height
Raising & lowering valve
Tires - (12)255/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 22,500# (5/8" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes - none (trailer exceeds 120,000# GVWR)
Brakes - 16 1/2" x 7" full air
Spring Brakes - one (1) axle (center axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber L.E.D. strobes in 3rd tail light position, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 18 total (6 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)</p> <p>Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer
Air & electrical connections for future 4th axle
Air lift 3rd axle</p> |
|---|---|

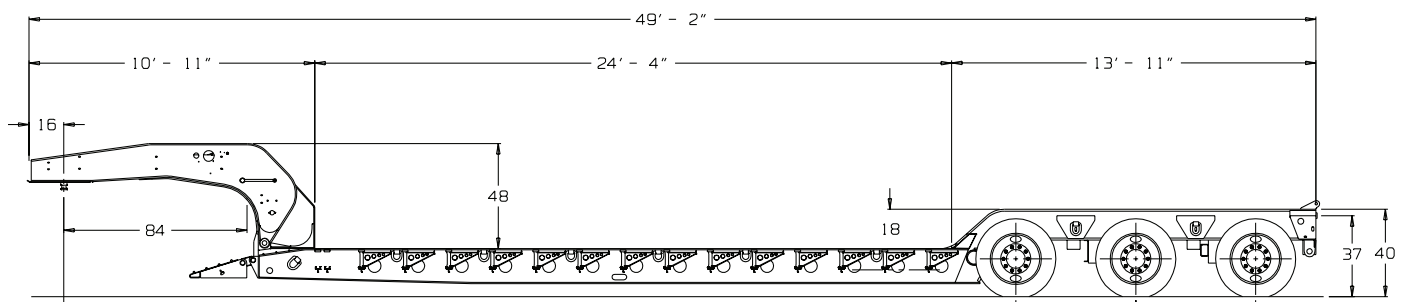

Model
RTN55ETD3

Capacity
55 Tons
Distributed
(50 tons in any 16')

Tire Size
255/70R22.5 (H)

Deck
24'-4" Level

Axles
3

Weight(lbs.)
20,290lbs.

5055 tons (RTN55ETD3)		List Price	Est Wgt
X	Base Price	\$96,456.00	20,290
X	Tons Capacity - 55 tons distributed over entire deck length/ 50 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
	Construction - (2) I-Beam, cambered, T-1 steel	-\$4,100.00	-1,900
	Custom/Paver Special - Tapered front beams (8/3/8" deep)	\$2,000.00	0
	Dropside Deck - 16 3/4" side height with 1 1/2" apitong and with transition ramp	\$3,675.00	1,800
	Dropside Deck - 16 3/4" side height with 1 1/2" apitong and no transition ramp	\$3,050.00	1,500
X	Overall length - Approximately 50'-0"	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,035.00	680
	Platform width - 10'-0"	\$3,300.00	1,180
X	Platform length - 24'-4"	\$0.00	0
	Platform length - 26'-0"	\$1,760.00	490
	Platform length - 28'-0"	\$3,520.00	980
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
	Platform Height/Road Clearance - 18"/6" (Adjustable)	\$3,500.00	1,500
	Platform Height/Road Clearance - 20"/6" (Adjustable)	\$2,350.00	700
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,460.00	330
	Auxiliary crossmembers full width between crossmembers	\$2,035.00	450
	Crossmembers on 24" centers	\$0.00	-200
X	Front folding ramps - steel with traction bars	\$0.00	0
	Front fixed ramps - 12" steel with traction bars	\$0.00	0
	Front folding ramps - 41" long wood filled, adjustable (only with paver special beams)	\$0.00	0
X	Frame reinforcement - for 4th flip/removable axle (close couple only)	\$0.00	0
X	Top flange reinforcement - outside of outer beams only	\$0.00	0
X	Bucket trough - last 3 crossmembers of deck	\$0.00	0
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542

	Bucket trough - none	-\$200.00	-325
	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	120
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20
	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 96"	\$650.00	150
	Swing clearance - 108" & 84"	\$1,295.00	550
	Swing clearance - 120"	\$1,800.00	700
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	1/8" aluminum top cover over gooseneck area - omit	-\$150.00	-60
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 31" long, wood filled, aluminum (not to be used with tapered beams)	\$1,130.00	170
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck (can be used tapered beams)	\$2,540.00	200

	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 22,500# 5/8" wall w/ 20,000# brakes and limit chains	\$0.00	0
	Axles - (3) 25,000# 3/4" wall w/ 23,000# brakes and limit chains (per axle)	\$235.00	35
	Tire inflation system - P.S.I. on all axles	\$1,275.00	15
X	Tires - (12) 255/70R22.5 (H)	\$0.00	0
	Tires - (12) 275/70R22.5 (H)	\$1,155.00	270
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	450
	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0


X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Amber L.E.D. strobes in 3rd tail light position w/ switch	\$0.00	0
X	Battery back-up with rechargeable feature	\$0.00	0
X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - 12" swinging/removable with double hook-on front. Full length of deck	\$0.00	0
	Extension brackets (outriggers) - weldments only	-\$500.00	-270
	Outrigger planks - 2" x 10" oak with spring tie downs	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (outside of main beams only)	\$0.00	0
	Decking - 1 1/2" Apitong (full width)	\$800.00	300
	Decking securement with carriage bolts and floor clips	\$595.00	60
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Boomwell - open bottom w/ extra low 1st crossmember (no cover plate)	\$0.00	0
	Boomwell - open bottom w/ extra low 1st crossmember (bolt-in cover plate)	\$385.00	50
X	Traction bars on front and & rear slopes	\$0.00	0
X	Chain hooks & flag holders slots on bolsters	\$0.00	0

X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
X	Air and electrical connections for future flip/removable axle	\$0.00	0
	Additional Equipment		
	Wheel well covers - 1/4" floorplate, one piece over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/4" floorplate, humpy bumpy over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/2" floorplate, one piece over tires only, bolt-on	\$5,100.00	1,770
	Wheel well covers - 1/2" floorplate, humpy bumpy over tires only, bolt-on	\$5,100.00	1,770
	Wheel well covers - plastic, individual over tires only, bolt-on	\$2,100.00	300
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120
	Flip/removable axle (8'-6" wide)- will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$15,220.00	2,420
	Flip/removable axle (9'-0" wide)- will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$15,605.00	2,550
	Flip/removable axle (10'-0" wide)- will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$16,400.00	2,680

Price Sheet No. C-RTN-5055-PS-25 Effective October 1, 2025	CUSTOM PAVER SPECIAL SERIES PS5055 "BLACKHAWK" HYDRAULIC REMOVABLE GOOSENECK FRONT LOADING TRAILERS 55 Ton Distributed over entire deck length 50 Tons in any 16'
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

STANDARD FEATURES AND EQUIPMENT

Load capacity - 55 distributed over entire deck length - 50 tons in any 16'-0" of deck	Flag holders in bolsters Ridewell air suspension Platform Length - 26' 0" Raising & lowering valve ±3" Adjustable ride height Tires - 255/70R22.5 (H) 16 PR tubeless radials Wheels - 8.25 x 22.5 steel disc (white) Hubs - Hub piloted with outboard drums Axles - 22,500# (5/8" wall thickness) with oil bearings Axle spacing - 55" Over-ride chains on all axles Anti-lock brakes - none (trailer exceeds 120,000# GVWR) Brakes - 16 1/2" x 7" full air Spring brakes - one (1) axle (center axle) Automatic slack adjusters Lighting - L.E.D. type - rubber mounted - mid turn signal Amber LED strobes in 3rd tail light position, with battery and rechargeable feature Finish - shot blast / epoxy primer / urethane finish Air lines - glad hands Electrical - 7 way receptacle Lash rings - 18 total (6 each side, bent style) (1 each bolster end, flat style) (1 each side at front of deck at 45°, flat style) Mud Flaps Red and white conspicuity markings Flag holder w/thumb screws at front of deck and rear of trailer Air lift 3rd axle
Hydraulic Removable Gooseneck High lift gooseneck (35" travel) Hydraulically operated by PTO/wet line Pin and stirrup design Pin setting - 16" Swing clearance - 84" Fifth wheel height - 50" loaded (adjustable 5 position - no blocks) Gooseneck support arm Vertical gooseneck locking pin (air operated) Main frame - 4 beam - 16" fully cambered Deck height - 22" (adjustable - no blocks) Ground clearance - 6" (adjustable - no blocks) Deck width - 8'-6" (102") Crossmember spacing - 20" Decking - 1 1/2" Apitong (full width) Decking securement - deck screws Front folding ramps - 41" adjustable width (wood filled) Outriggers - none (weldments included for later installation of outriggers) Tapered front beams (8 3/8" deep) 3:1 sloped deck (18°) Covered with 1 1/2" Apitong Full width rear deck Covered with 1 1/2" Apitong 4" roller stop at rear of trailer, width of main beam Top flange reinforcement (full length - outside flanges only)	

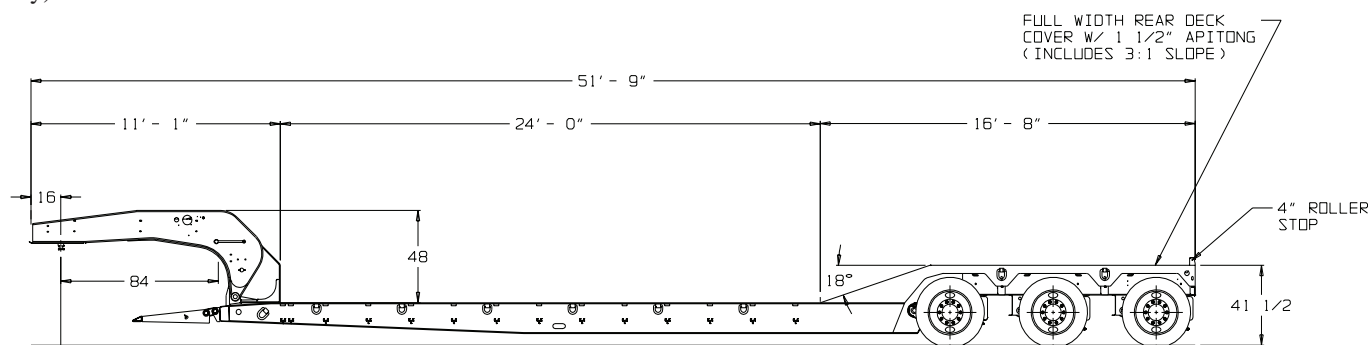

Model
RTN55ETD3-PS

Capacity
55 Tons
Distributed
(50 tons in any 16")

Tire Size
255/70R22.5 (H)

Deck
24' Level

Axles
3

Weight(lbs.)
20,300lbs.

5055 tons (RTN55ETD3-PS)		List Price	Est Wgt
X	Base Price	\$101,088.00	20,300
X	Tons Capacity - 55 tons distributed over entire deck length/ 50 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
X	Custom/paver special - tapered front beams (8-3/8" deep)	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,035.00	680
	Platform width - 10'-0"	\$3,300.00	1,180
X	Platform length - 24'-0"	\$0.00	0
	Platform length - 26'-0"	\$1,760.00	430
	Platform length - 28'-0"	\$3,520.00	860
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,460.00	330
	Auxiliary crossmembers full width between crossmembers	\$2,035.00	450
	Crossmembers on 24" centers	\$0.00	-200
X	Front folding ramps - 41" long wood filled, adjustable	\$0.00	0
X	Frame reinforcement - none	\$0.00	0
X	Bucket trough - none	\$0.00	0
	Bucket trough - last 3 crossmembers of deck	\$1,000.00	325
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	650
	Bucket trough filler - removable, wood filled	\$1,350.00	170
	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20

	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 96"	\$650.00	150
	Swing clearance - 108"	\$800.00	400
	Swing clearance - 108" & 84"	\$1,295.00	550
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck.	\$2,540.00	200
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 22,500# 5/8" wall w/ 20,000# brakes and limit chains	\$0.00	0
	Axles - (3) 25,000# 3/4" wall w/ limit chains (per axle)	\$235.00	35
	Tire inflation system - P.S.I. on all axles	\$1,275.00	15

	Dust shields (per axle)	\$70.00	20
	Cam saver tubes (per axle)	\$300.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 255/70R22.5 (H)	\$0.00	0
	Tires - (12) 275/70R22.5 (H)	\$1,155.00	270
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	450
	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Battery back-up - amber strobe lights on battery back-up	\$0.00	0
X	3rd taillight package - amber L.E.D. strobe warning lamps	\$0.00	0
X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - none (weldments only)	\$0.00	0

	Extension brackets (outriggers) -12" swinging/removable outriggers (without outrigger planks). Includes 12" double hook-on outriggers at front of deck. "Full length" of deck	\$960.00	270
	Outrigger planks - 2" x 10" oak with spring tie downs (only with decking outside main beams only)	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs (only with decking outside main beams only)	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (Full Width)	\$0.00	0
	Decking - 1 1/2" Apitong (outside main beams only)	-\$250.00	-300
	Decking securement with carriage bolts and floor clips	\$880.00	90
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Flag holder slots in bolsters	\$0.00	0
X	Rear deck - full width-wood covered, 1 1/2" apitong	\$0.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (no cover plate)	\$2,600.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (bolt-in cover plate)	\$2,985.00	50
	Rear deck - removable, wood filled boomwell filler	\$1,500.00	660
X	Rear slope (main to rear deck) - 3 to 1 (18 degree) with full width decking	\$0.00	0
	Rear slope (main to rear deck) - 3 to 1 (18 degree) w/ open center	\$0.00	0
	Rear slope (main to rear deck) - removable wood filled rear slope filler	\$2,500.00	250
X	Roller stop at rear	\$0.00	0
	Roller stop at rear - none	-\$100.00	-15
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
	Additional Equipment		
	Aluminum storage baskets bolt-in	\$175.00	20
	Wide load sign brackets only	\$300.00	10

	Oversize load sign - removable	\$525.00	120
--	--------------------------------	----------	-----

Price Sheet No. C-RTN-55-25 Effective October 1, 2025


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

CUSTOM RTN SERIES
HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS
55 Ton
(in any 12'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 55 tons in any 12'-0" of deck in 3+1 (14'-1" spread) axle configuration
Hydraulic Removable Gooseneck
High lift gooseneck (42" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 108" & 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Frame reinforced-For 3+1 (14'-1" spacing) or close coupled 4th axle.
Main frame - 4 beam - 16" fully cambered
Top flange reinforcement (full length ... outside flanges only)
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
Deck width - 8'-6" (102")
Crossmember spacing - 20"
Decking - 1 1/2" Apitong (open center)
Decking securement - deck screws
Front folding ramps - steel w/ traction bars
Outriggers - 12" swinging/removable w/double hook-on at front
Bucket trough at rear of deck (covered with steel plate)
Half front bolsters with traction bars
Extra low 1st crossmember in rear bridge
Load bearing bolsters between axles (drop style)
Load bearing half bolsters at rear (drop style)
Boom well (full length including rear half bolster)

Chain slots and flag holders in bolsters
Ridewell air suspension
±3" Adjustable ride height
Raising & lowering valve
Tires - (12) 275/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 25,000# (3/4" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes - none (trailer exceeds 120,000# GVWR)
Brakes - 16 1/2" x 7" full air
Spring Brakes - one (1) axle (center axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber L.E.D. strobes in 3rd tail light position, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 18 total
(6 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)
Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer
Air & electrical connections for future 4th axle
Air lift 3rd axle

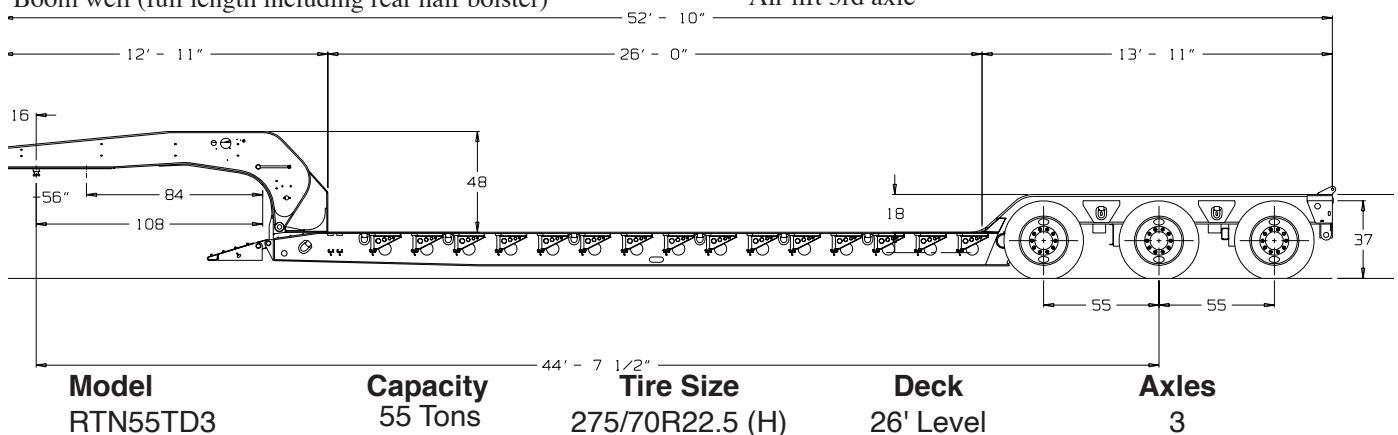

Weight(lbs.)
22,700lbs.

55 tons (RTN55TD3)		List Price	Est Wgt
X	Base Price	\$107,000.00	21,500
X	Tons Capacity - 55 tons in any 12'	\$0.00	0
	Tons capacity - 55 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
	Construction - (2) I-Beam, cambered, T-1 steel	-\$4,100.00	-1,900
	Custom/Paver Special - Tapered front beams (8/3/8" deep)	\$2,000.00	0
	Dropside deck 16 3/4" side height with 1 1/2" apitong and with transition ramp	\$3,675.00	1,800
	Dropside deck 16 3/4" side height with 1 1/2" apitong and no transition ramp	\$3,050.00	1,500
X	Overall length - Approximately 53'-0"	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,090.00	680
	Platform width - 10'-0"	\$3,190.00	1,180
X	Platform length - 26'-0"	\$0.00	0
	Platform length - 28'-0"	\$1,980.00	270
	Platform length - 30'-0"	\$3,960.00	540
	Platform length - 32'-0"	\$6,960.00	810
	Platform length - 34'-0"	\$9,960.00	1,080
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
	Platform Height/Road Clearance - 18"/6" (Adjustable)	\$3,500.00	1500
	Platform Height/Road Clearance - 20"/6" (Adjustable)	\$2,350.00	700
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,460.00	330
	Auxiliary crossmembers full width between crossmembers	\$2,035.00	450
	Crossmembers on 24" centers	\$0.00	-200
X	Front folding ramps - steel with traction bars	\$0.00	0
	Front fixed ramps - 12" steel with traction bars	\$0.00	0
	Front folding ramps - 41" long wood filled, adjustable (only with paver special beams)	\$0.00	0
X	Frame reinforcement - for a 3+1 (14'-1" spread)	\$0.00	0
	Frame reinforcement - for 4 closed couple axles only	\$0.00	-250
X	Top flange reinforcement - outside of outer beams only	\$0.00	0
X	Bucket trough - last 3 crossmembers of deck	\$0.00	0

	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542
	Bucket trough - none	-\$200.00	-325
	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20
	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 108" & 84"	\$0.00	0
	Swing clearance - 120"	\$1,800.00	300
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	1/8" aluminum top cover over gooseneck area - omit	-\$150.00	-60
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 31" long, wood filled, aluminum (not to be used with tapered beams)	\$1,130.00	170
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck (can be used with tapered beams)	\$2,540.00	200

	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 25,000# 3/4" wall w/ 23,000# brakes and limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all 3 axles	\$1,275.00	15
X	Tires - (12) 275/70R22.5 (H)	\$0.00	0
	Tires - (12) 255/70R22.5 (H) (per axle)	-\$200.00	-90
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	450
	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5

	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Amber L.E.D. strobes in 3rd tail light position w/ switch	\$0.00	0
X	Battery back-up with rechargeable feature	\$0.00	0
X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - 12" swinging/removable with double hook-on front. Full length of deck	\$0.00	0
	Extension brackets (outriggers) - weldments only	-\$500.00	-270
	Outrigger planks - 2" x 10" oak with spring tie downs	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (outside of main beams only)	\$0.00	0
	Decking - 1 1/2" Apitong (full width)	\$800.00	300
	Decking securement with carriage bolts and floor clips	\$595.00	60
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Boomwell - open bottom w/ extra low 1st crossmember (no cover plate)	\$0.00	0
	Boomwell - open bottom w/ extra low 1st crossmember (bolt-in cover plate)	\$385.00	50
X	Traction bars on front and rear slopes	\$0.00	0
X	Chain hooks & flag holders slots on bolsters	\$0.00	0
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0

X	Air and electrical connections for future flip/removable axle	\$0.00	0
	Additional Equipment		
	Wheel well covers - 1/4" floorplate, one piece over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/4" floorplate, humpy bumpy over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/2" floorplate, one piece over tires only, bolt-on	\$5,100.00	1,700
	Wheel well covers - 1/2" floorplate, humpy bumpy over tires only, bolt-on	\$5,100.00	1,700
	Wheel well covers - plastic, individual over tires only, bolt-on	\$2,100.00	300
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120
	Axle extension (stinger bar) for 3+1 (14'-1" spread)	\$12,570.00	1,700
	Hydraulic booster w/ 5.5HP power pack for 3+1 (14'-1" spread)	\$34,965.00	2,000
	Flip/removable axle (8'-6" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$15,820.00	2,420
	Flip/removable axle (9'-0" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$16,080.00	2,550
	Flip/removable axle (10'-0" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$16,770.00	2,680

Effective October 1, 2025

CUSTOM RTN SERIES


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

55 Ton Paver Special
HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS
55 Ton
(in any 12'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 55 tons in 12'
Hydraulic Removable Gooseneck
High lift gooseneck (35" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 108" & 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Main frame - 4 beam - 16" fully cambered
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
Deck width - 8'-6" (102")
Crossmember spacing - 20"
Decking - 1 1/2" Apitong (full width)
Decking securement - deck screws
Front folding ramps - 41" adjustable width (wood filled)
Outriggers - none (weldments included for later installation of outriggers)
Tapered front beams (8 3/8" deep)
3:1 sloped deck (18°) Covered with 1 1/2" Apitong
Full width rear deck Covered with 1 1/2" Apitong
4" roller stop at rear of trailer, width of main beam
Top flange reinforcement (full length - outside flanges only)
Flag holders in bolsters
Ridewell air suspension

Platform Length - 26' 0"
Raising & lowering valve
±3" Adjustable ride height
Tires - 275/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 25,000# (3/4" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes - none (trailer exceeds 120,000# GVWR)
Brakes - 16 1/2" x 7" full air
Spring brakes - one (1) axle (center axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber LED strobes in 3rd tail light position, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 18 total
(6 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)
Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer
Air lift 3rd axle

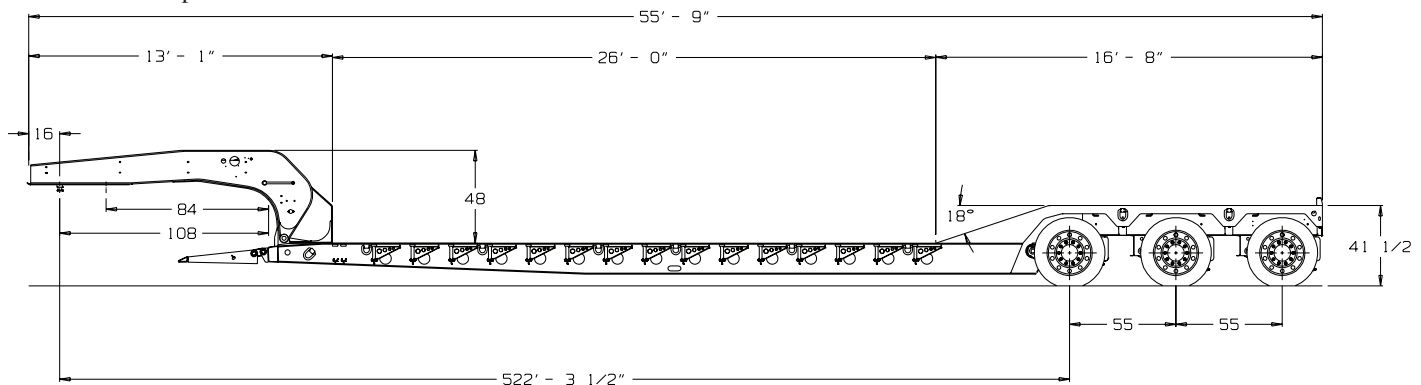

Model
RTN55TD3-PS

Capacity
55 Tons
in any 12'

Tire Size
275/70R22.5 (H)

Deck
26' Level

Axes
3

Weight(lbs.)
24,380 lbs.

55 tons (RTN55TD3-PS)		List Price	Est Wgt
X	Base Price	\$119,000.00	24,380
X	Tons Capacity - 55 tons in any 12'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
X	Custom/paver special - tapered front beams (8-3/8" deep)	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,230.00	630
	Platform width - 10'-0"	\$3,500.00	1,180
X	Platform length - 26'-0"	\$0.00	0
	Platform length - 28'-0"	\$1,980.00	270
	Platform length - 30'-0"	\$3,960.00	540
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
	Platform Height/Road Clearance - 20"/6" (Adjustable) 14" deep main beams	\$2,350.00	700
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,460.00	330
	Auxiliary crossmembers full width between crossmembers	\$2,035.00	450
X	Front folding ramps - 41" long wood filled, adjustable	\$0.00	0
X	Frame reinforcement for 4 flip/removable 4th axle (closed couple axles only)	\$0.00	0
X	Bucket trough - none	\$0.00	0
	Bucket trough - last 3 crossmembers of deck	\$1,000.00	325
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542
	Bucket trough filler - removable, wood filled	\$1,350.00	200
	Bucket trough - no plate	\$0.00	-100
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520

	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20
	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 108" & 84"	\$0.00	0
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck.	\$2,540.00	260
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75

	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 25,000# 3/4" wall w/ 23,000# brakes and limit chains	\$0.00	0
	Axles - (3) 25,000# 3/4" wall w/ 25,000# brakes and limit chains (Usually for Northeast U.S.) (per axle)	\$300.00	60
	Tire inflation system - P.S.I. on all axles	\$1,275.00	15
	Dust shield (per axle)	\$70.00	20
	Cam saver tubes (per axle)	\$300.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 275/70R22.5 (H)	\$0.00	0
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	450
	Liquid filled air gauge with chart (only available with open boomwell)	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Battery back-up - amber strobe lights on battery back-up	\$0.00	0
X	3rd taillight package - amber L.E.D. strobe warning lamps	\$0.00	0

X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - none (weldments only)	\$0.00	0
	Extension brackets (outriggers) -12" swinging/removable outriggers (without outrigger planks). Includes 12" double hook-on outriggers at front of deck. Full length of deck	\$960.00	270
	Outrigger planks - 2" x 10" oak with spring tie downs (only with decking outside main beams only)	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs (only with decking outside main beams only)	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 1 1/2" Apitong (Full Width)	\$0.00	0
	Decking - 1 1/2" Apitong (outside main beams only)	-\$250.00	-300
	Decking securement with carriage bolts and floor clips	\$880.00	90
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Flag holder slots in bolsters	\$0.00	0
X	Rear deck - full width-wood covered, 1 1/2" apitong	\$0.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (no cover plate)	\$2,600.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (bolt-in cover plate)	\$2,985.00	50
	Rear deck - removable, wood filled boomwell filler	\$1,500.00	280

X	Rear slope (main to rear deck) - 3 to 1 (18 degree) with full width decking	\$0.00	0
	Rear slope (main to rear deck) - 3 to 1 (18 degree) w/ open center	\$0.00	0
	Rear slope (main to rear deck) - removable wood filled rear slope filler	\$2,500.00	680
X	Roller stop at rear	\$0.00	0
	Roller stop at rear - none	-\$100.00	-15
X	Air and electrical connections - for future flip/removable axle.	\$575.00	30
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
	Additional Equipment		
	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120

Price Sheet No. C-RTN60-25 Effective October 1, 2025


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

CUSTOM RTN SERIES
HYDRAULIC REMOVABLE GOOSENECK
FRONT AND REAR LOADING TRAILERS
60 Ton
(in any 12'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 60 tons in any 12'-0" of deck in 3+1 (14'-1" spread) axle configuration
Hydraulic Removable Gooseneck
High lift gooseneck (42" travel)
Hydraulically operated by PTO/wet line
Pin and stirrup design
Pin setting - 16"
Swing clearance - 108" & 84"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)
Gooseneck support arm
Vertical gooseneck locking pin (air operated)
Frame reinforced-For 3+1 (14'-1" spacing) or close coupled 4th axle.
Main frame - 4 beam - 16" fully cambered
Top flange reinforcement (full length ... outside flanges only)
Deck height - 22" (adjustable - no blocks)
Ground clearance - 6" (adjustable - no blocks)
Deck width - 8'-6" (102")
Crossmember spacing - 20"
Decking - 2" Apitong (open center)
Decking securement - deck screws
Front folding ramps - steel w/ traction bars
Outriggers - 12" swinging/removable w/double hook-on at front
Bucket trough at rear of deck (covered with steel plate)
Extra low 1st crossmember in rear bridge
Half front bolsters with traction bars
Load bearing bolsters between axles (drop style)
Load bearing half bolsters at rear (drop style)
Boomwell (full length including rear half bolster)

Chain slots and flag holders in bolsters
Ridewell air suspension
 ± 3 " Adjustable ride height
Raising & lowering valve
Tires - (12) 275/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 steel disc (white)
Hubs - Hub piloted with outboard drums
Axles - 25,000# (3/4" wall thickness) with oil bearings
Axle spacing - 55"
Over-ride chains on all axles
Anti-lock brakes - none (trailer exceeds 120,000# GVWR)
Brakes - 16 1/2" x 7" full air
Spring Brakes - one (1) axle (center axle)
Automatic slack adjusters
Lighting - L.E.D. type - rubber mounted - mid turn signal
Amber L.E.D. strobes in rear 3rd tail light position, with battery and rechargeable feature
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lash rings - 18 total
(6 each side, bent style)
(1 each bolster end, flat style)
(1 each side at front of deck at 45°, flat style)
Mud Flaps
Red and white conspicuity markings
Flag holder w/thumb screws at front of deck and rear of trailer
Air & electrical connections for future 4th axle
Air lift 3rd axle

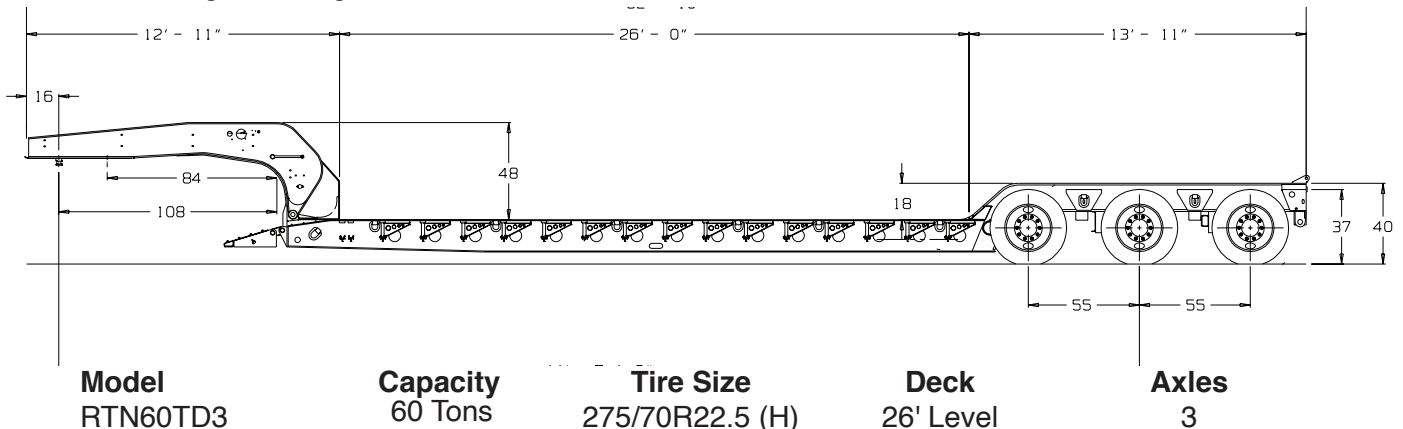

Weight(lbs.)
25,350lbs.

60 tons (RTN60TD3)		List Price	Est Wgt
X	Base Plate	\$128,484.00	25,350
X	Tons Capacity - 60 tons in any 12'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
	Construction - (2) I-Beam, cambered, T-1 steel	-\$4,500.00	-2,050
	Custom/Paver Special - Tapered front beams (8/3/8" deep)	\$2,000.00	0
	Dropside deck 16 3/4" side height with 1 1/2" apitong with transition ramp	\$4,575.00	2,000
	Dropside deck 16 3/4" side height with 1 1/2" apitong no transition ramp	\$3,950.00	1,700
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,530.00	620
	Platform width - 10'-0"	\$3,730.00	1,390
X	Platform length - 26'-0"	\$0.00	0
	Platform length - 28'-0"	\$2,200.00	540
	Platform length - 30'-0"	\$4,400.00	1,080
	Platform length - 32'-0"	\$7,400.00	1,620
	Platform length - 34'-0"	\$10,400.00	2,160
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
	Platform Height/Road Clearance - 18"/6" (Adjustable)	\$4,000.00	1,800
	Platform Height/Road Clearance - 20"/6" (Adjustable)	\$2,700.00	1,000
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,870.00	390
	Auxiliary crossmembers full width between crossmembers	\$2,420.00	570
	Crossmembers on 24" centers	\$0.00	-200
X	Front folding ramps - steel with traction bars	\$0.00	0
	Front fixed ramps - 12" steel with traction bars	\$1.00	0
	Front folding ramps - 41" long wood filled, adjustable (only with paver special beams)	\$0.00	0
X	Frame reinforcement - for a 3+1 (14'-1" spread)	\$0.00	0
	Frame reinforcement - for 4 closed couple axles only	\$0.00	-250
X	Top flange reinforcement - outside of outer beams only	\$0.00	0
X	Bucket trough - last 3 crossmembers of deck	\$0.00	0
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542
	Bucket trough - none	-\$500.00	-325
	Bucket trough - no plate	\$0.00	-100

X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20
	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 108" & 84"	\$0.00	0
	Swing clearance - 120"	\$1,900.00	290
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	1/8" aluminum top cover over gooseneck area - omit	-\$150.00	-60
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 31" long, wood filled, aluminum (not to be used with tapered beams)	\$1,130.00	170
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck (can be used tapered beams)	\$2,540.00	200
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0

X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on two axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 25,000# 3/4" wall w/ 23,000# brakes and limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all axles	\$1,275.00	15
	Dust shields (per axle)	\$70.00	20
	Cam saver tubes (per axle)	\$300.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 275/70R22.5 (H)	\$0.00	0
	Tires - (12) 255/70R22.5 (H)	-\$200.00	-90
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	555
	Liquid filled air gauge with chart	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5


	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Amber L.E.D. strobes in 3rd tail light position w/ switch	\$0.00	0
X	Battery back-up with rechargeable feature	\$0.00	0
X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - 12" swinging/removable with double hook-on front. Full length of deck	\$0.00	0
	Extension brackets (outriggers) - none (weldments only)	-\$500.00	-270
	Outrigger planks - 2" x 10" oak with spring tie downs	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 2" Apitong (outside of main beams only)	\$0.00	0
	Decking - 2" Apitong (full width)	\$800.00	500
	Decking securement with carriage bolts and floor clips	\$595.00	75
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Boomwell - open bottom w/ extra low 1st crossmember (no cover plate)	\$0.00	0
	Boomwell - open bottom w/ extra low 1st crossmember (bolt-in cover plate)	\$385.00	50
X	Traction bars on front and rear slopes	\$0.00	0
X	Chain hooks & flag holders slots on bolsters	\$0.00	0
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0

X	Air and electrical connections for future flip/removable axle	\$0.00	0
	Additional Equipment		
	Wheel well covers - 1/4" floorplate, one piece over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/4" floorplate, humpy bumpy over tires only, bolt-on	\$4,200.00	1,290
	Wheel well covers - 1/2" floorplate, one piece over tires only, bolt-on	\$5,100.00	1,770
	Wheel well covers - 1/2" floorplate, humpy bumpy over tires only, bolt-on	\$5,100.00	1,770
	Wheel well covers - plastic, individual over tires only, bolt-on	\$2,100.00	300
	Aluminum storage baskets bolt-in	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120
	Axle extension (stinger bar) for 3+1 (14'-1" spread)	\$13,940.00	1,700
	Hydraulic booster w/ 5.5HP power pack for 3+1 (14'-1" spread)	\$35,835.00	2,000
	Flip/removable axle (8'-6" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$15,935.00	3,220
	Flip/removable axle (9'-0" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$16,195.00	3,350
	Flip/removable axle (10'-0" wide) - will match trailer's air suspension, tires, wheels, axles and all connections (price based on standard options)	\$16,885.00	3,595

Price Sheet No. C-RTN60-PS-25 Effective October 1, 2025	CUSTOM RTN SERIES
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	60 Ton Paver Special HYDRAULIC REMOVABLE GOOSENECK FRONT AND REAR LOADING TRAILERS 60 Ton (in any 12'-0" of deck)

STANDARD FEATURES AND EQUIPMENT

Load capacity - 60 tons in any 12'-0" of deck	± 3" Adjustable ride height
Hydraulic Removable Gooseneck	Manual exhaust valve
High lift gooseneck (35" travel)	Tires - 275/70R22.5 (H) 16 PR tubeless radials
Hydraulically operated by PTO/wet line	Wheels - 8.25" x 22.5" steel disc (white)
Pin and stirrup design	Hubs - Hub piloted with outboard drums
Pin setting - 16"	Axles - 22,500lbs (3/4" wall thickness) with oil bearings
Swing clearance - 108" + 84"	Axle spacing - 55"
Fifth wheel height - 50" loaded (adjustable 5 position - no blocks)	Over-ride chains on all axles
Gooseneck support arm	Anti-lock brakes - none (trailer exceeds 120,000lb GVWR)
Vertical gooseneck locking pin (air operated)	Brakes - 16-1/2" x 7" air
1/8" aluminum floorplate for top of gooseneck (bolt-on)	Spring Brakes - one (1) axle (center axle)
Main frame - 4 beam - 16" fully cambered	Automatic slack adjusters
Deck height - 22" (adjustable - no blocks)	Lighting - L.E.D. type - rubber mounted - mid turn signal
Ground clearance - 6" (adjustable - no blocks)	Amber L.E.D. strobes with battery back-up
Deck width - 8'-6" (102")	Finish - shot blast / epoxy primer / urethane finish.
Crossmember spacing - 20"	Gloss Black, Etnyre Red, Etnyre Signal Yellow,
Decking - 2" Apitong (full width)	Etnyre Mission Gray, or Etnyre White
Decking securement - deck screws	Air lines - glad hands
Front Folding Ramps - 41" adjustable width (wood filled)	Electrical - 7 way receptacle
Outriggers - none (weldments included for later installation of outriggers)	Lash rings - 18 total (6 each side, bent style)
Tapered front beams (8-3/8" deep)	(1 each bolster end, flat style)
3:1 sloped deck (18°) covered with 1-1/2" Apitong	(1 each side at front of deck at 45°, flat style)
Full width rear deck covered with 1-1/2" Apitong	Mud Flaps
Top flange reinforcement (outside main beams only)	Red and white conspicuity markings
4" high roller stop at rear of trailer, width of main beam	Flag holder w/thumb screws at front of deck and rear of trailer
Flag holders in bolsters	Air lift 3rd axle
Ridewell air suspension	Air & electrical connections for future 4th axle

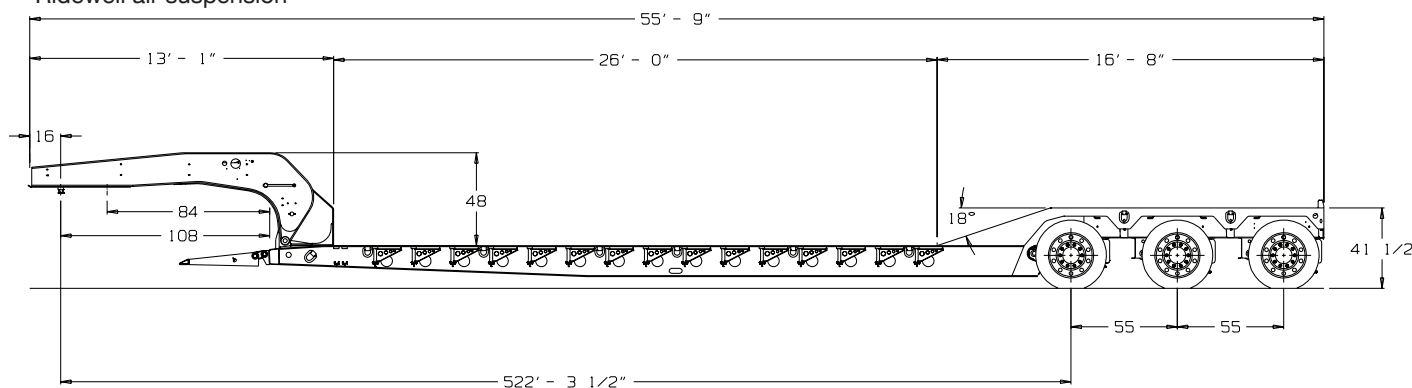

Model	Capacity	Tire Size	Deck	Axes
RTN60TD3-PS	60 tons in any 12'	275/70R22.5 (H)	26' Level	3
Weight(Lbs)				
28,380				

60 tons (RTN60TD3-PS)		List Price	Est Wgt
X	Base Price	\$137,524.00	28,380
X	Tons Capacity - 60 tons in any 12'	\$0.00	0
X	Construction - (4) I-Beam, cambered, T-1 steel	\$0.00	0
X	Custom/paver special - tapered front beams (8-3/8" deep)	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$2,530.00	620
	Platform width - 10'-0"	\$3,730.00	1,390
X	Platform length - 26'-0" (with 2" apitong on main deck)	\$0.00	0
	Platform length - 28'-0" (with 2" apitong on main deck)	\$2,200.00	540
	Platform length - 30'-0" (with 2" apitong on main deck)	\$4,400.00	1,080
X	Platform Height/Road Clearance - 22"/6" (Adjustable)	\$0.00	0
X	Crossmembers on 20" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,870.00	390
	Auxiliary crossmembers full width between crossmembers	\$2,420.00	570
X	Front folding ramps - 41" long wood filled, adjustable	\$0.00	0
X	Frame reinforcement for 4 flip/removable 4th axle (closed couple axles only)	\$0.00	0
X	Bucket trough - none	\$0.00	0
	Bucket trough - last 3 crossmembers of deck	\$1,000.00	325
	Bucket trough - last 4 crossmembers of deck	\$1,170.00	435
	Bucket trough - last 5 crossmembers of deck	\$1,370.00	542
	Bucket trough filler - removable, wood filled	\$1,350.00	200
X	Hydraulic system - from tractor wetline	\$0.00	0
	Hydraulic system - removable 13HP Honda power pack (self-contained) and full length aluminum hinged and lockable cover	\$4,700.00	520
	Hydraulic system - removable 13HP Honda power pack with dual operations and full length aluminum hinged and lockable cover	\$5,195.00	680
	Hydraulic system - from tractor wetline (pipe for power pack and wetline operation)	\$495.00	160
X	Gooseneck - Non-Ground Engaging Removable-Hi Lift	\$0.00	0
	Gooseneck Support Arm - Dual	\$1,000.00	20

	Gooseneck Support Arm - Equipped with a cross bar	\$500.00	15
X	Gooseneck support cylinder - hydraulic	\$0.00	0
X	Gooseneck connection - pin & stirrup type w/ vertical air lock pin	\$0.00	0
X	Swing clearance - 108" & 84"	\$0.00	0
X	Fifth wheel height (50" loaded) - 48"-50"-52"-54"-56" loaded (adjustable)	\$0.00	0
	Fifth wheel height (52" loaded) - 50"-52"-54"-56"-58" loaded (adjustable)	\$350.00	50
	Fifth wheel height (54" loaded) - 52"-54"-56"-58"-60" loaded (adjustable)	\$700.00	75
X	1/8" aluminum top cover over gooseneck area	\$0.00	0
	Gooseneck Additional Equipment		
	Aluminum hinged and lockable cover at rear of gooseneck	\$440.00	50
	Chain and binder rack with base plate at rear of gooseneck	\$340.00	95
	Base plate only at rear of gooseneck	\$145.00	20
	Gooseneck fenders - 10GA steel with clearance lights	\$1,540.00	430
	Gooseneck fenders - aluminum with clearance lights	\$1,845.00	215
	Gooseneck fenders - plastic with clearance lights	\$1,650.00	100
	Center hook-on ramps - 41" long, wood filled, aluminum, two piece stored on side of gooseneck.	\$2,540.00	250
	Gooseneck light bar - (2) clear work lights and (2) red tail lights at rear of gooseneck	\$550.00	20
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$714.00	50
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M (6 sensors/3 modulators)	\$2,000.00	100
X	Spring brakes on 2nd axle	\$0.00	0
	Spring brakes on 1st and 2nd axles	\$235.00	30
	Spring brakes on all axles	\$470.00	60
X	Axles - (3) 25,000# 3/4" wall w/ 23,000# brakes and limit chains	\$0.00	0
	Axles - (3) 25,000# 3/4" wall w/ 25,000# brakes and limit chains (Usually for Northeast U.S.) - per axle	\$300.00	60

	Tire inflation system - P.S.I. on all axles	\$1,275.00	15
	Dust shields (per axle)	\$70.00	20
	Cam saver tubes (per axle)	\$300.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 275/70R22.5 (H)	\$0.00	0
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	555
	Liquid filled air gauge with chart (only available with open boomwell)	\$150.00	10
X	Suspension - air lift 3rd axle only	\$0.00	0
X	Suspension - +3/-3 Height Control, Auto/Manual	\$0.00	0
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional red clearance lights in center of rear light panel to make 5 in a row (1 pair)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
X	Battery back-up - amber strobe lights on battery back-up	\$0.00	0
X	3rd taillight package - amber L.E.D. strobe warning lamps	\$0.00	0
X	Lash rings - (18) total, 6-per side, bent style, 1-each side front of deck flat style on 45 degree angle, 1-each bolster end flat style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
X	Extension brackets - none (weldments only)	\$0.00	0
	Extension brackets (outriggers) -12" swinging/removable outriggers (without outrigger planks). Includes 12" double hook-on outriggers at front of deck. Full length of deck	\$960.00	270

	Outrigger planks - 2" x 10" oak with spring tie downs (only with decking outside main beams only)	\$530.00	460
	Outrigger planks - 2" x 10" oak ship loose	\$530.00	460
	Outrigger planks - 2" x 10" apitong with spring tie downs (only with decking outside main beams only)	\$925.00	500
	Outrigger planks - 2" x 10" apitong ship loose	\$925.00	500
X	Decking - 2" Apitong (Full Width)	\$0.00	0
	Decking - 2" Apitong (outside main beams only)	-\$250.00	-250
	Decking securement with carriage bolts and floor clips	\$880.00	90
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Flag holder slots in bolsters	\$0.00	0
X	Rear deck - full width-wood covered, 1 1/2" apitong	\$0.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (no cover plate)	\$2,600.00	0
	Rear deck - open bottom w/ extra low 1st crossmember and with 1 1/2" apitong over tires only (bolt-in cover plate)	\$2,985.00	50
	Rear deck - removable, wood filled boomwell filler	\$1,500.00	650
X	Rear slope (main to rear deck) - 3 to 1 (18 degree) with full width decking	\$0.00	0
	Rear slope (main to rear deck) - 3 to 1 (18 degree) w/ open center	\$0.00	0
	Rear slope (main to rear deck) - removable wood filled rear slope filler	\$2,500.00	250
X	Roller stop at rear - 4" high, width of main beams	\$0.00	0
	Roller stop at rear - none	-\$100.00	-15
X	Flag Holder w/ thumbs screws - 1-pair front corner of deck, 1-pair ends of light panel	\$0.00	0
X	Air and electrical connections - for future flip/removable axle	\$0.00	0
	Additional Equipment		

	Aluminum storage baskets bolt-in (per section)	\$175.00	20
	Wide load sign brackets only	\$300.00	10
	Oversize load sign - removable	\$525.00	120

Price Sheet No. C-RPS-25 Effective October 1, 2025	PS SERIES PAVER SPECIAL FIXED GOOSENECK TANDEM AXLE TRAILERS 35 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	


Price Sheet No. C-RPS-25 Effective October 1, 2025	PS SERIES PAVER SPECIAL FIXED GOOSENECK TANDEM AXLE TRAILERS 35 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

Price Sheet No. C-RPS-25 Effective October 1, 2025	PS SERIES PAVER SPECIAL FIXED GOOSENECK TANDEM AXLE TRAILERS 35 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

STANDARD FEATURES AND EQUIPMENT

48'-0" Overall length
Fixed (rigid) gooseneck
Full width gooseneck
Pin setting - 16"
Swing clearance - 80"
3:1 Gooseneck slope (18°)
Level platform (deck)
Fifth wheel height - 50" loaded
Telescopic drop legs
Concentrated load in 16'-0"
Main frame - Two (2) beam design
100,000 P.S.I. steel mainbeams
One (1) piece crossmembers on 24" centers
Deck height - 33" loaded
Deck width - 8'-6" (102")
Decking - 1 1/2" Apitong, full width
Deck securement - deck screws
Hydraulic bi-fold ramps (8'-0" x 36")

12 Volt electric-hydraulic power package
Covered wheel wells - 1/4" steel floor plate
4'-4" (52") sloping afterdeck/wood covered
Air ride suspension
Manual exhaust valve
Tires - 235/75R17.5 (H) 16 PR tubeless radials
Hubs - hub piloted
Wheels - 6.75 x 17.5 steel disc (white)
Brakes - 12 1/4" x 7 1/2" full air
Spring brakes - one (1) axle (rear axle)
Anti-Lock brakes (2S/2M System)
Automatic slack adjusters
Axles - 22,500 pounds with oil bearings
Lighting - L.E.D. type - rubber mounted - mid turn signal
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lashing rings - 14 (7 each side/bent style)
Mud flaps
Red and white conspicuity markings

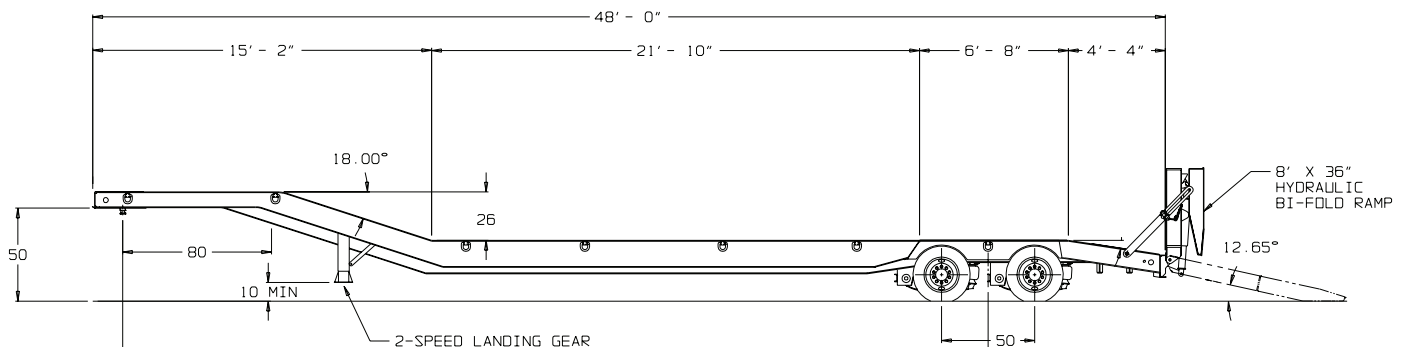

Model R35TL-PS	Capacity 35 Tons	Tire Size 235/75R17.5 (H)	Length 48'-0" OAL	Axles 2
Weight(lbs.) 16,500lbs.				

Model R35TL-PS	Capacity 35 Tons	Tire Size 235/75R17.5 (H)	Length 48'-0" OAL	Axles 2
Weight(lbs.) 16,500lbs.				

Model R35TL-PS	Capacity 35 Tons	Tire Size 235/75R17.5 (H)	Length 48'-0" OAL	Axles 2
Weight(lbs.) 16,500lbs.				

Model R35TL-PS	Capacity 35 Tons	Tire Size 235/75R17.5 (H)	Length 48'-0" OAL	Axles 2
Weight(lbs.) 16,500lbs.				

Model R35TL-PS	Capacity 35 Tons	Tire Size 235/75R17.5 (H)	Length 48'-0" OAL	Axles 2
Weight(lbs.) 16,500lbs.				

Weight(lbs.)
16,500lbs.

35 tons (R35TL-PS)		List Price	Est Wgt
X	Base Price	\$87,608.00	16,500
X	35 tons in any 16'	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,610.00	640
	Platform width - 10'-0"	\$4,370.00	2,020
X	Platform length - 28'-6" (48'-0" O.A.L. with a 80" swing clearance)	\$0.00	0
	Platform length - 29'-6" (49'-0" O.A.L. with a 80" swing clearance)	\$800.00	250
	Platform length - 30'-6" (50'-0" O.A.L. with a 80" swing clearance)	\$1,600.00	500
	Platform length - 31'-6" (51'-0" O.A.L. with a 80" swing clearance)	\$2,400.00	750
	Platform length - 32'-6" (52'-0" O.A.L. with a 80" swing clearance)	\$3,200.00	1,000
	Platform length - 33'-6" (53'-0" O.A.L. with a 80" swing clearance)	\$4,000.00	1,250
	Platform length - 34'-6" (54'-0" O.A.L. with a 80" swing clearance)	\$4,800.00	1,500
X	Platform Height - 33" loaded	\$0.00	0
	Platform Height - 38" loaded (with 255/70R22.5 (H) tires)	\$0.00	0
X	Gooseneck type - fixed, full width	\$0.00	0
	Tool box w/ lid - front driver side corner of gooseneck	\$350.00	90
	Spare tire carrier under the front slope	\$750.00	25
X	Crossmembers on 24" centers	\$0.00	0
	Auxiliary crossmembers - outside main beams between crossmembers lower deck only	\$1,460.00	300
	Auxiliary crossmembers - full width between crossmembers lower deck only	\$2,035.00	460
X	Gooseneck slope - 3 to 1 (18 degrees)	\$0.00	0
	Gooseneck slope - 90 degrees	\$0.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 48" loaded	\$180.00	-60
	Fifth wheel height - 52" loaded	\$295.00	60
	Fifth wheel height - 54" loaded	\$345.00	120
X	Swing clearance - 80"	\$0.00	0
	Swing clearance - 96" (will change the overall length)	\$920.00	300
	Swing clearance - 108" (will change the overall length)	\$1,585.00	600
	Swing clearance - 120" (will change the overall length)	\$2,240.00	900
X	Brakes - 12.25" x 7-1/2" air w/ auto slacks adjusters	\$0.00	0
	FMVSS 121 brake system - 16 1/2" x 7" air w/ auto slacks adjusters (to be used with 255/70 tires)	\$900.00	150

X	Spring brakes on one axle	\$0.00	0
	Spring brakes on both axles (with FMVSS 121 brake system)	\$235.00	30
X	Tires - (8) 235/75R17.5 (H)	\$0.00	0
	Tires - (8) 255/70R22.5 (H) (per axle)	\$330.00	90
X	Wheels - steel disc, 10 hole, hub piloted	\$0.00	0
	Alcoa aluminum wheels - polished inners & outers, 6.75" x 17.5" (per axle)	\$1,750.00	-110
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Axles - (2) 22,500 5/8" wall	\$0.00	0
	Axles - (2) 25,000" 3/4" wall (per axle)	\$235.00	35
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Suspension - Air ride with 50" axle spacing including raising and lowering valve	\$0.00	0
	Liquid filled air gauge with chart	\$150.00	10
	Raising and lowering valve at rear of trailer	\$500.00	10
X	Anti-lock brakes - 2S/2M system (2-sensors/2-modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M system (2-sensors/1-modulators)	\$575.00	25
	Anti-lock brakes - 4S/2M system (4-sensors/2-modulators)	\$960.00	75
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
	3rd tail light package - red tail light	\$95.00	5
X	Ramps - Hydraulic bi-fold (36" x 8') w/ 12V power pack & sliding lock bar	\$0.00	0
	Ramps - Hydraulic bi-fold (36" x 12') w/ 12V power pack & sliding lock bar	\$3,000.00	250


X	Lash rings - 14 total, 7-per side, bent style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Sloping afterdeck (beavertail - 4'-4")	\$0.00	0
X	Decking - 1 1/2" Apitong full width, full width	\$0.00	0
	Decking securement with carriage bolts and floor clips	\$880.00	90
	Stake pockets (per stake pocket)	\$125.00	5
	Chain slots on outer beams, full length of deck	\$1,000.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Landing gear - 2-speed landing gear	\$0.00	0
X	Covered wheels - 1/4" steel floorplate	\$0.00	0
	Additional Equipment		
	12,000# hydraulic winch includes 100' of 7/16" cable and hook	\$4,400.00	450
	20,000# hydraulic winch includes 100' of 9/16" cable and hook	\$7,150.00	550
	Remote control for winch wireless	\$5,000.00	20
	Cable protector/wear plate at rear of upper deck	\$500.00	25
	Cable roller	\$750.00	50

Price Sheet No. C-RPS-25 Effective October 1, 2025	PS SERIES PAVER SPECIAL FIXED GOOSENECK TANDEM AXLE TRAILERS 50 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

STANDARD FEATURES AND EQUIPMENT

48'-0" Overall length
 Fixed (rigid) gooseneck
 Full width gooseneck
 Pin setting - 16"
 Swing clearance - 80"
 3:1 Gooseneck slope (18°)
 Level platform (deck)
 Fifth wheel height - 50" loaded
 Telescopic drop legs
 Concentrated load in 16'-0"
 Main frame - Two (2) beam design
 100,000 P.S.I. steel mainbeams
 One (1) piece crossmembers on 24" centers
 Deck height - 33" loaded
 Deck width - 8'-6" (102")
 Decking - 1 1/2" Apitong, full width
 Deck securement - deck screws
 Hydraulic bi-fold ramps (8'-0" x 36")

12 Volt electric-hydraulic power package
 Covered wheel wells - 1/4" steel floor plate
 4'-4" (52") sloping afterdeck/wood covered
 Air ride suspension
 Manual exhaust valve
 Tires - 235/75R17.5 (H) 16 PR tubeless radials
 Hubs - hub piloted
 Wheels - 6.75 x 17.5 steel disc (white)
 Brakes - 12 1/4" x 7 1/2" full air
 Spring brakes - one (1) axle (rear axle)
 Anti-Lock brakes (2S/2M System)
 Automatic slack adjusters
 Axles - 22,500 pounds with oil bearings
 Lighting - L.E.D. type - rubber mounted - mid turn signal
 Finish - shot blast / epoxy primer / urethane finish
 Air lines - glad hands
 Electrical - 7 way receptacle
 Lashing rings - 14 (7 each side/bent style)
 Mud flaps
 Red and white conspicuity markings

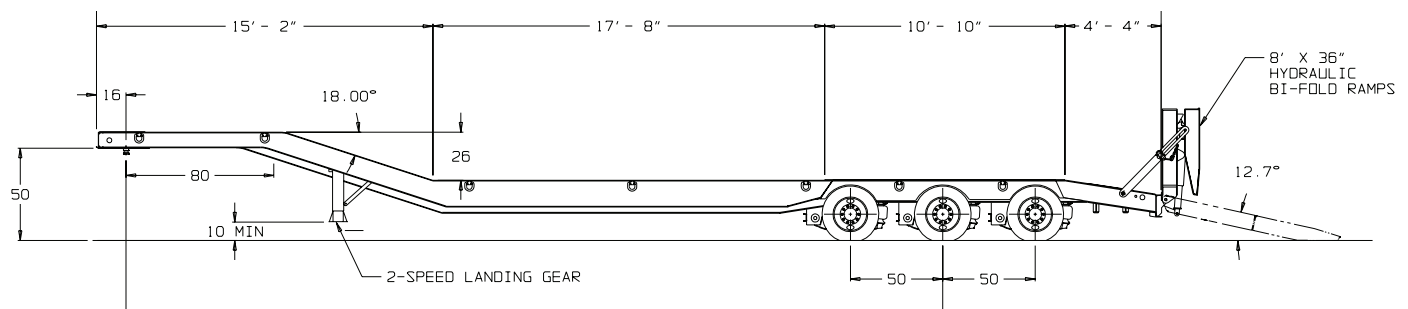

Model
R50TL3-PS

Capacity
50 Tons

Tire Size
235/75R17.5 (H)

Length
48'-0" OAL

Axles
3

Weight(lbs.)
19,500lbs.

50 tons (R50TL3-PS)		List Price	Est Wgt
X	Base Price	\$108,456.00	19,500
X	50 tons in any 16'	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,610.00	704
	Platform width - 10'-0"	\$4,370.00	2,222
X	Platform length - 28'-6" (48'-0" O.A.L. with a 80" swing clearance)	\$0.00	0
	Platform length - 29'-6" (49'-0" O.A.L. with a 80" swing clearance)	\$800.00	275
	Platform length - 30'-6" (50'-0" O.A.L. with a 80" swing clearance)	\$1,600.00	550
	Platform length - 31'-6" (51'-0" O.A.L. with a 80" swing clearance)	\$2,400.00	825
	Platform length - 32'-6" (52'-0" O.A.L. with a 80" swing clearance)	\$3,200.00	1,100
	Platform length - 33'-6" (53'-0" O.A.L. with a 80" swing clearance)	\$4,000.00	1,375
	Platform length - 34'-6" (54'-0" O.A.L. with a 80" swing clearance)	\$4,800.00	1,650
X	Platform Height - 33" loaded	\$0.00	0
	Platform Height - 38" loaded (with 255/70R22.5 (H) tires)	\$0.00	0
X	Gooseneck type - fixed, full width	\$0.00	0
	Tool box w/ lid - front driver side corner of gooseneck	\$350.00	99
	Spare tire carrier under the front slope	\$750.00	25
X	Crossmembers on 24" centers	\$0.00	0
	Auxiliary crossmembers - outside main beams between crossmembers lower deck only	\$1,460.00	300
	Auxiliary crossmembers - full width between crossmembers lower deck only	\$2,035.00	460
X	Gooseneck slope - 3 to 1 (18 degrees)	\$0.00	0
	Gooseneck slope - 90 degrees	\$0.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 48" loaded	\$180.00	-60
	Fifth wheel height - 52" loaded	\$295.00	60
	Fifth wheel height - 54" loaded	\$345.00	120
X	Swing clearance - 80"	\$0.00	0
	Swing clearance - 96" (will change the overall length)	\$920.00	300
	Swing clearance - 108" (will change the overall length)	\$1,585.00	600
	Swing clearance - 120" (will change the overall length)	\$2,240.00	900
X	Brakes - 12.25" x 7-1/2" air w/ auto slacks adjusters	\$0.00	0
	FMVSS 121 brake system - 16 1/2" x 7" air w/ auto slacks adjusters (to be used with 255/70 tires)	\$900.00	150

X	Spring brakes on one axle	\$0.00	0
	Spring brakes on 2 axles	\$235.00	30
	Spring brakes on all 3 axles (with FMVSS 121 brake system)	\$470.00	60
X	Tires - (12) 235/75R17.5 (H)	\$0.00	0
	Tires - (12) 255/70R22.5 (H) (per axle)	\$330.00	90
X	Wheels - steel disc, 10 hole, hub piloted	\$0.00	0
	Alcoa aluminum wheels - polished inners & outers, 6.75" x 17.5" (per axle)	\$1,750.00	-110
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Axles - (3) 22,500 5/8" wall	\$0.00	0
	Axles - (3) 25,000" 3/4" wall (per axle)	\$235.00	35
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Suspension - Air ride with 50" axle spacing including raising and lowering valve	\$0.00	0
	Liquid filled air gauge with chart	\$150.00	10
	Raising and lowering valve at rear of trailer	\$500.00	10
X	Anti-lock brakes - 2S/2M system (2-sensors/2-modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M system (2-sensors/1-modulators)	\$575.00	25
	Anti-lock brakes - 4S/2M system (4-sensors/2-modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M system (6-sensors/3-modulators)	\$2,000.00	100
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
	3rd tail light package - red tail light	\$95.00	5
X	Ramps - Hydraulic bi-fold (36" x 8') w/ 12V power pack & sliding lock bar	\$0.00	0
	Ramps - Hydraulic bi-fold (36" x 12') w/ 12V power pack & sliding lock bar	\$3,000.00	200

X	Lash rings - 14 total, 7-per side, bent style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Sloping afterdeck (beavertail - 4'-4")	\$0.00	0
X	Decking - 1 1/2" Apitong full width	\$0.00	0
	Decking securement with carriage bolts and floor clips	\$880.00	90
	Stake pockets	\$125.00	5
	Chain slots on outer beams, full length of deck	\$1,000.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Landing gear - 2-speed landing gear	\$0.00	0
X	Covered wheels - 1/4" steel floorplate	\$0.00	0
	Additional Equipment		
	12,000# hydraulic winch includes 100' of 7/16" cable and hook	\$4,400.00	450
	20,000# hydraulic winch includes 100' of 9/16" cable and hook	\$7,150.00	550
	Remote control for winch wireless	\$5,000.00	20
	Cable protector/wear plate at rear of upper deck	\$500.00	25
	Cable roller	\$750.00	50

Price Sheet No. C-SR35TL-25 Effective October 1, 2025

All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.


SR SERIES
HYDRAULIC
REAR LOADING TANDEM AXLE
HYDRAULIC RAMP TRAILER

35 Ton

STANDARD FEATURES AND EQUIPMENT

48'-0" Overall length
Fixed (rigid) gooseneck
Full width gooseneck
Pin setting - 16"
Swing clearance - 80"
2:1 Gooseneck slope (26-1/2°)
Telescopic drop legs
Level platform (deck)
Fifth wheel height - 50" loaded
Capacity - 35 tons distributed
- 30 tons in 10'-0"
Main frame - four beam type
100,000psi steel mainbeams
One (1) piece crossmembers on 24" centers
Deck height - 33" loaded
Deck width - 8'-6" (102")
Decking - 1-1/2" Apitong, full width
Deck securement - deck screws
Covered wheel wells - 1/4" steel floor plate
Load carrying hydraulic rear ramp
(50% of payload in center of ramp)

Load ramp - 8'-6" wide x 11'-0" long
Main ramp - 8'-6" wide x 8'-0" long
(wood deck, 13.5° load angle)
Approach ramp - 8'-6" wide x 3'-0" long
(1/4" steel floor plate)
Ramp lock - compression blocks
Air ride suspension with hand control raise/lower valve
Tires - 235/75R17.5 (H) 16 PR tubeless radials
Hubs - hub piloted
Wheels - 6.75" x 17.5" steel disc (white)
Brakes - 12-1/4" x 7-1/2" air
Spring brakes - one (1) axle (rear axle)
Anti-lock brakes (2S/2M system)
Automatic slack adjusters
Axles - 22,500lbs with oil bearings
Lighting - L.E.D. type - rubber mounted - mid turn signal
Finish - shot blast - epoxy primer - urethane finish
Air lines - glad hands
Electrical - 7 way receptacle
Lashing rings - 14 (7 each side, "bent" style)
Mud flaps
Red & white conspicuity markings

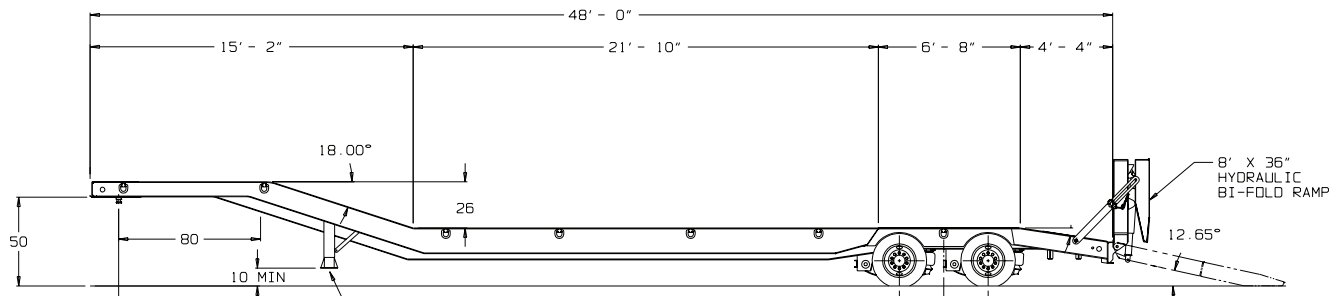

Model
SR35TL

Capacity
35 Tons

Tire Size
235/75R17.5 (H)

Length
27' (48'-0" OAL)

Axles
2

Weight(lbs.)
16,300lbs.

35 tons (SR35TL)		List Price	Est Wgt
X	Base Price	\$85,500.00	16,300
X	Tons Capacity - 35 tons distributed (30 tons in any 10')	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,350.00	640
	Platform width - 10'-0"	\$4,000.00	1,380
X	Platform length - 27'-0" (48'-0" O.A.L. with a 80" swing clearance)	\$0.00	0
	Platform length - 29'-0" (50'-0" O.A.L. with a 80" swing clearance)	\$1,200.00	1,200
	Platform length - 31'-0" (52'-0" O.A.L. with a 80" swing clearance)	\$2,400.00	2,400
	Platform length - 33'-0" (54'-0" O.A.L. with a 80" swing clearance)	\$3,600.00	3,600
X	Platform Height - 33" loaded	\$0.00	0
	Platform Height - 38" loaded (with 255/70R22.5 (H) tires)	\$0.00	0
X	Crossmembers on 24" centers	\$0.00	0
	Auxiliary crossmembers full width between crossmembers, 12" centers, lower deck only	\$1,500.00	390
	Auxiliary crossmembers full width between crossmembers, 8" centers, lower deck only	\$1,925.00	650
	Auxiliary crossmembers full width between crossmembers, 12" centers, full length of trailer including gooseneck and deck)	\$2,100.00	700
	Auxiliary crossmembers full width between crossmembers, 8" centers, full length of trailer including gooseneck and deck)	\$2,600.00	850
X	Gooseneck type - fixed, full width, 26 1/2" degree slope	\$0.00	0
	Gooseneck type - full width gooseneck (apitong flooring) includes vertical drop with splash plates	\$0.00	0
	Gooseneck type - fixed, full width, 18 degree slope	\$1,560.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 48" loaded	\$150.00	-60
	Fifth wheel height - 52" loaded	\$250.00	60
	Fifth wheel height - 54" loaded	\$300.00	110
X	Swing clearance - 80"	\$0.00	0
	Swing clearance - 96" (will change the overall length)	\$575.00	300
	Swing clearance - 108" (will change the overall length)	\$1,200.00	600
	Swing clearance - 120" (will change the overall length)	\$1,675.00	900
	Gooseneck Additional Equipment		
	Power pack - 13HP Honda power pack, self contained (cannot run winches)	\$6,215.00	420

	Tool box with lid and latch over kingpin area	\$350.00	90
	Control levers at gooseneck	\$650.00	20
X	Brakes - 12.25" x 7-1/2" air w/ auto slacks adjusters	\$0.00	0
	FMVSS 121 brake system - 16 1/2" x 7" air w/ auto slacks adjusters (to be used with 255/70 tires)	\$900.00	150
X	Anti-lock brakes - 2S/2M system (2-sensors/2-modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M system (2-sensors/1-modulators)	\$575.00	25
	Anti-lock brakes - 4S/2M system (4-sensors/2-modulators)	\$960.00	75
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on both axles	\$235.00	30
X	Axles - (2) 22,500 5/8" wall	\$0.00	0
	Axles - (2) 25,000" 3/4" wall (per axle)	\$235.00	35
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (8) 235/75R17.5 (H)	\$0.00	0
	Tires - (8) 255/70R22.5 (H) (per axle)	\$330.00	200
X	Wheels - steel disc, 10 hole, hub piloted	\$0.00	0
	Alcoa aluminum wheels - polished inners & outers, 6.75" x 17.5" (per axle)	\$1,750.00	-110
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - Cush air ride with 50" axle spacing including raising and lowering valve	\$0.00	0
	Manual exhaust valve on all axles	\$300.00	10
	Liquid filled air gauge with chart	\$150.00	10
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
	3rd tail light package - red tail light	\$95.00	5


X	Lash rings - 14 total, 7-per side, bent style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Extension brackets - none	\$0.00	0
	Extension brackets (outriggers) - swingout brackets set for 2" planks	\$3,625.00	370
X	Decking - 1 1/2" Apitong full width	\$0.00	0
	Hydraulic ramp - 14° from platform to gooseneck	\$8,000.00	1,000
	Stake pockets (per stake pocket)	\$125.00	10
	Chain slots on outer beams, full length of deck	\$1,000.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Hydraulic folding tail - 11' full width ramp (8' main & 3' fold under approach)	\$0.00	0
	Hydraulic folding tail - 14' full width ramp (10' main & 4' fold under approach)	\$7,500.00	580
	Steel floorplate on approach ramp	\$1,000.00	160
	Traction bars on approach ramp	\$1,000.00	150
X	Landing gear - 2-speed landing gear	\$0.00	0
	Additional Equipment		
	12,000# hydraulic winch includes 100' of 7/16" cable and hook	\$4,400.00	450
	20,000# hydraulic winch includes 100' of 9/16" cable and hook	\$7,150.00	550
	30,000# hydraulic winch includes 100' of 3/4" cable and hook	\$14,500.00	80
	Remote control for winch wireless	\$5,000.00	25
	Mounting plate for future 20,000# winch	\$750.00	50

Price Sheet No. C-SR50TL3-25 Effective October 1, 2025	SR SERIES HYDRAULIC REAR LOADING TANDEM AXLE HYDRAULIC RAMP TRAILER
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	50 Ton

STANDARD FEATURES AND EQUIPMENT

48'-0" Overall length
 Fixed (rigid) gooseneck
 Full width gooseneck
 Pin setting - 16"
 Swing clearance - 80"
 2:1 Gooseneck slope (26-1/2°)
 Telescopic drop legs
 Level platform (deck)
 Fifth wheel height - 50" loaded
 Capacity - 50 tons distributed
 - 45 tons in 10'-0"
 Main frame - four beam type
 100,000psi steel mainbeams
 One (1) piece crossmembers on 24" centers
 Deck height - 33" loaded
 Deck width - 8'-6" (102")
 Decking - 1-1/2" Apitong, full width
 Deck securement - deck screws
 Covered wheel wells - 1/4" steel floor plate
 Load carrying hydraulic rear ramp
 (50% of payload in center of ramp)

Load ramp - 8'-6" wide x 11'-0" long
 Main ramp - 8'-6" wide x 8'-0" long
 (wood deck, 13.5° load angle)
 Approach ramp - 8'-6" wide x 3'-0" long
 (1/4" steel floor plate)
 Ramp lock - compression blocks
 Air ride suspension with hand control raise/lower valve
 Tires - 235/75R17.5 (H) 16 PR tubeless radials
 Hubs - hub piloted
 Wheels - 6.75" x 17.5" steel disc (white)
 Brakes - 12-1/4" x 7-1/2" air
 Spring brakes - one (1) axle (rear axle)
 Anti-lock brakes (2S/2M system)
 Automatic slack adjusters
 Axles - 22,500lbs with oil bearings
 Lighting - L.E.D. type - rubber mounted - mid turn signal
 Finish - shot blast - epoxy primer - urethane finish
 Air lines - glad hands
 Electrical - 7 way receptacle
 Lashing rings - 14 (7 each side, "bent" style)
 Mud flaps
 Red & white conspicuity markings

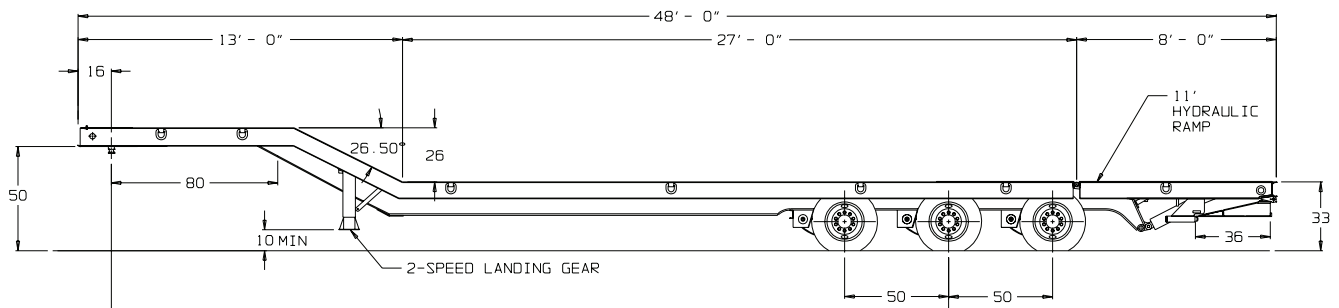

Model
SR50TL3

Capacity
50 Tons

Tire Size
235/75R17.5 (H)

Length
27' (48'-0" OAL)

Axles
3

Weight(lbs.)
20,030lbs.

50 tons (SR50TL3)		List Price	Est Wgt
X	Base Price	\$103,720.00	20,160
X	Tons Capacity - 50 tons distributed (45 tons in any 10')	\$0.00	0
X	Platform Width - 8'-6"	\$0.00	0
	Platform Width - 9'-0"	\$1,550.00	640
	Platform Width - 10'-0"	\$4,200.00	1,380
X	Platform length - 27'-0" (48'-0" O.A.L. with a 80" swing clearance)	\$0.00	0
	Platform length - 29'-0" (50'-0" O.A.L. with a 80" swing clearance)	\$1,400.00	300
	Platform length - 31'-0" (52'-0" O.A.L. with a 80" swing clearance)	\$2,600.00	600
	Platform length - 33'-0" (54'-0" O.A.L. with a 80" swing clearance)	\$3,800.00	900
X	Platform Height - 33" loaded	\$0.00	0
	Platform Height - 38" loaded (with 255/70R22.5 (H) tires)	\$0.00	0
X	Crossmembers on 24" centers	\$0.00	0
	Auxiliary crossmembers full width between crossmembers, 12" centers, lower deck only	\$1,700.00	490
	Auxiliary crossmembers full width between crossmembers, 8" centers, lower deck only	\$2,125.00	750
	Auxiliary crossmembers full width between crossmembers, 12" centers, full length of trailer including gooseneck and deck)	\$2,300.00	800
	Auxiliary crossmembers full width between crossmembers, 8" centers, full length of trailer including gooseneck and deck)	\$2,800.00	950
X	Gooseneck type - fixed, full width, 26 1/2" degree slope	\$0.00	0
	Gooseneck type - full width gooseneck (apitong flooring) includes vertical drop with splash plates	\$0.00	0
	Gooseneck type - fixed, full width, 18 degree slope	\$1,760.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 48" loaded	\$150.00	-60
	Fifth wheel height - 52" loaded	\$450.00	60
	Fifth wheel height - 54" loaded	\$500.00	110
X	Swing clearance - 80"	\$0.00	0
	Swing clearance - 96" (will change the overall length)	\$775.00	300
	Swing clearance - 108" (will change the overall length)	\$1,400.00	600
	Swing clearance - 120" (will change the overall length)	\$1,875.00	900
	Gooseneck Additional Equipment	\$0.00	0
	Power pack - 13HP Honda power pack, self contained (cannot run winches)	\$6,215.00	420

	Tool box with lid and latch over kingpin area	\$350.00	90
	Control levers at gooseneck	\$650.00	20
X	Brakes - 12.25" x 7-1/2" air w/ auto slacks adjusters	\$0.00	0
	FMVSS 121 brake system - 16 1/2" x 7" air w/ auto slacks adjusters (to be used with 255/70 tires)	\$900.00	150
X	Anti-lock brakes - 2S/2M system (2-sensors/2-modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M system (2-sensors/1-modulators)	\$575.00	25
	Anti-lock brakes - 4S/2M system (4-sensors/2-modulators)	\$960.00	75
	Anti-lock brakes - 6S/3M system (6-sensors/3-modulators)	\$2,000.00	100
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on both axles	\$235.00	30
	Spring brakes on all 3 axles	\$470.00	60
X	Axles - (3) 22,500 5/8" wall	\$0.00	0
	Axles - (3) 25,000" 3/4" wall (per axle)	\$235.00	35
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 235/75R17.5 (H)	\$0.00	0
	Tires - (8) 255/70R22.5 (H) (per axle)	\$330.00	200
X	Wheels - steel disc, 10 hole, hub piloted,	\$0.00	0
	Alcoa aluminum wheels - polished inners & outers, 6.75" x 17.5" (per axle)	\$1,750.00	-110
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - Cush air ride with 50" axle spacing including raising and lowering valve	\$0.00	0
	Manual exhaust valve on all axles	\$300.00	10
	Liquid filled air gauge with chart	\$150.00	10
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5


	Additional mid turn signals (per pair up to 5 pairs)	\$95.00	10
	3rd tail light package - red tail light	\$95.00	5
X	Lash rings - 14 total, 7-per side, bent style	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Extension brackets - none	\$0.00	0
	Extension brackets (outriggers) - swingout brackets set for 2" planks	\$3,825.00	370
X	Decking - 1 1/2" Apitong full width	\$0.00	0
	Hydraulic ramp - 14° from platform to gooseneck	\$8,000.00	1,000
	Stake pockets (per stake pocket)	\$125.00	10
	Chain slots on outer beams, full length of deck	\$1,000.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre Color Selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Hydraulic folding tail - 11' full width ramp (8' main & 3' fold under approach)	\$0.00	0
	Hydraulic folding tail - 14' full width ramp (10' main & 4' fold under approach)	\$7,500.00	580
	Steel floorplate on approach ramp	\$1,000.00	160
	Traction bars on approach ramp	\$1,000.00	150
X	Landing gear - 2-speed landing gear	\$0.00	0
	Additional Equipment		
	12,000# hydraulic winch includes 100' of 7/16" cable and hook	\$4,400.00	450
	20,000# hydraulic winch includes 100' of 9/16" cable and hook	\$7,150.00	550
	30,000# hydraulic winch includes 100' of 3/4" cable and hook	\$14,500.00	80
	Remote control for winch wireless	\$5,000.00	25
	Mounting plate for future 20,000# winch	\$750.00	50

Price Sheet No. C-MRG30/35/40-25 Effective October 1, 2025	MRG SERIES MECHANICAL REMOVABLE GOOSENECK FRONT LOADING TRAILERS 30 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

STANDARD FEATURES AND EQUIPMENT

Mechanical removable gooseneck
 Full width gooseneck platform with 1 1/2" Apitong
 Slot type tie downs on gooseneck platform
 Swing-A-Way stirrups (tear drops)
 Pin setting - 16"
 Swing clearance - 84"
 Fifth wheel height - 50" loaded
 Concentrated load in 16'-0"
 Main frame - 4 beam design - 12" fully cambered
 100,000 PSI yield strength steel construction
 8" I Beam crossmembers on 24" centers
 Positive gooseneck locking pin (viewable from tractor)
 Deck height - 18" loaded
 Ground clearance - 6" loaded
 Deck width - 8'-6" (102")
 Top flange reinforcement - front slope
 Decking - 1 1/2" Apitong (butt joint)
 Deck securement - deck screws
 Outriggers - None

Full width rear load deck (platform), traction bars on slope.
 1 1/2" Apitong full width
 Slot type tie downs on rear platform
 Ridewell air suspension
 Manual exhaust valve
 Tires - (8) 255/70R22.5 (H), 16 PR tubeless radials
 Hubs - Hub piloted with outboard drums
 Wheels - (8) 8.25 x 22.5 steel disc (white)
 Axles - 22,500 pounds with oil bearings
 Axle spacing - 50"
 Anti-Lock brakes (2S/2M System) .
 Brakes - 16 1/2" x 7" air
 Spring brakes - one (1) axle (rear axle)
 Automatic slack adjusters
 Lighting - L.E.D. type - rubber mounted - mid turn signal
 Finish - shot blast / epoxy primer / urethane finish
 Air lines - glad hands
 Electrical - 7 way receptacle
 Lashing rings - 10 (5 each side)
 Mud flaps
 Red and white conspicuity markings

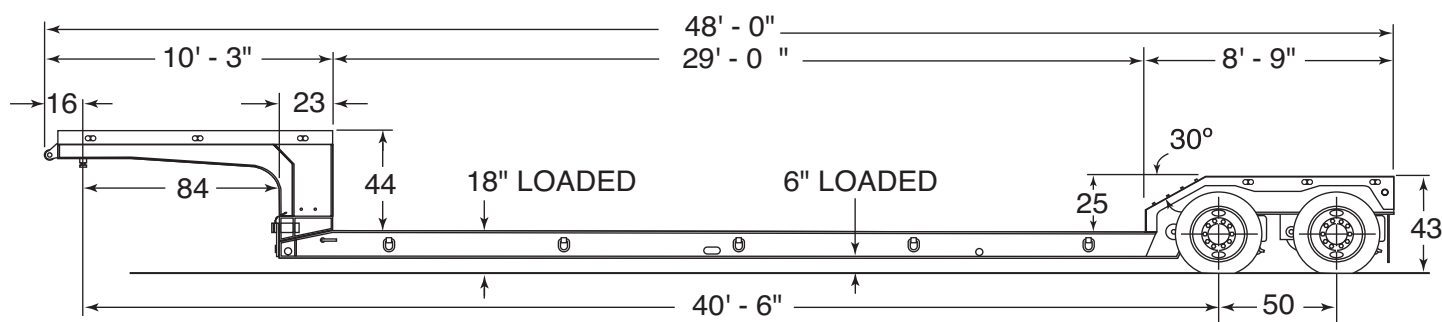

MRG30/35/40

Model	Capacity	Length	Axles	Tire Size	List Price	Wt. (Lbs.)
MRG30TD	30	48' - 0" OAL	2	255/70R22.5 (H)	\$88,020.00	15,100

30 tons (MRG30TD)		List Price	Est Wgt
X	Base Price	\$88,020.00	15,100
X	Tons Capacity - 30 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, 12" deep, fully cambered, T-1	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,100.00	300
	Platform width - 10'-0"	\$2,200.00	600
X	Platform length - 29'-0"	\$0.00	0
	Platform length - 31'-0"	\$1,200.00	700
	Platform length - 33'-0"	\$2,400.00	1,400
X	Platform Height/Road Clearance - 18"/6" loaded	\$0.00	0
X	Top flange reinforcement on front slope	\$0.00	0
X	Crossmembers spacing 8" I-beam on 24" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,325.00	330
	Auxiliary crossmembers full width between crossmembers	\$1,850.00	450
X	Frame reinforcement - none	\$0.00	0
	Frame reinforcement for 3 closed couple axles only	\$3,500.00	700
X	Gooseneck - Full width-mechanical removable	\$0.00	0
	Tool box with lid in gooseneck (in drop/between mainbeams)	\$350.00	120
	Gooseneck - narrow	-\$950.00	-320
	Gooseneck - fixed	-\$1,700.00	-320
	Hydraulic system - wetline operations	\$0.00	0
	Hydraulic gooseneck - non ground engaging removable-hi lift	\$14,000.00	2,000
	Aluminum mudflaps - at rear of gooseneck	\$400.00	25
X	Gooseneck lock pin - mechanical viewable from the tractor	\$0.00	0
	Connections - air actuated gooseneck to deck locking pin	\$400.00	125
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 49" & 47" double donut loaded	\$0.00	50
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 108"	\$500.00	500
X	Swing A-Way stirrups on gooseneck for detaching	\$0.00	0
	Gooseneck connections - pin & stirrups type w/ vertical locking pin	\$0.00	0
X	Slot type tie downs - tie downs slots on gooseneck	\$0.00	0

X	Full width rear deck - 1 1/2" apitong full width & traction bars up slope	\$0.00	0
	Boomwell - open bottom with no cover	\$2,600.00	0
	Boomwell - open bottom with cover	\$2,985.00	50
X	Platform tie down slots - tie down slots on rear platform	\$0.00	0
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on two axles	\$235.00	30
X	Axles - (2) 22,500# 5/8" wall	\$0.00	0
	Axles - (2) 25,000# 3/4" wall (per axle)	\$235.00	35
	Dust shields on both axles	\$140.00	40
	Cam saver tubes on both axles (per axle)	\$300.00	20
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Suspension - Ridewell air ride with 50" axle spacing	\$0.00	0
	Suspension - Ridewell air ride with 55" axle spacing	\$325.00	120
	Suspension - Ridewell air ride with 60" axle spacing	\$1,000.00	300
	Liquid filled air gauge with chart	\$150.00	10
X	Manual exhaust valve on all axles	\$0.00	0
X	Tires - (8) 255/70R22.5 (H)	\$0.00	0
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5


X	Lash rings - (10) total, 5-per side	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Decking - 1 1/2" Apitong, full width, butt joint	\$0.00	0
	Decking - 1 1/2" Apitong, open center, butt joint	-\$730.00	-500
	Decking securements with carriage bolts and floor clips	\$880.00	90
	Chain slots full length of deck	\$1,000.00	0
	Stake pockets (per stake pocket)	\$125.00	5
X	Extension brackets - none	\$0.00	0
	Extension brackets - 12" cast removable/swinging outriggers	\$1,500.00	280
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$1,520.00	520
	Outrigger planks - 2" x 10" oak with spring tie downs	\$1,125.00	560
	Extruded aluminum pullouts with aluminum pullout on front approach and short face plate	\$21,000.00	1,400
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
	Additional Equipment		
	Aluminum storage baskets bolt-in - (per section)	\$175.00	20
	Air & electrical connections for future 3rd flip/removable axle (must have frame reinforcement)	\$575.00	160

Price Sheet No. C-MRG30/35/40-25 Effective October 1, 2025	MRG SERIES MECHANICAL REMOVABLE GOOSENECK FRONT LOADING TRAILERS : 35 Ton (in any 16'-0" of deck)
All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.	

STANDARD FEATURES AND EQUIPMENT

Mechanical removable gooseneck
 Full width gooseneck platform with 1 1/2" Apitong
 Slot type tie downs on gooseneck platform
 Swing-A-Way stirrups (tear drops)
 Pin setting - 16"
 Swing clearance - 84"
 Fifth wheel height - 50" loaded
 Concentrated load in 16'-0"
 Main frame - 4 beam design - 12" fully cambered
 100,000 PSI yield strength steel construction
 8" I Beam crossmembers on 24" centers
 Positive gooseneck locking pin (viewable from tractor)
 Deck height - 18" loaded
 Ground clearance - 6" loaded
 Deck width - 8'-6" (102")
 Top flange reinforcement - front slope
 Decking - 1 1/2" Apitong (butt joint)
 Deck securement - deck screws
 Outriggers - None

Full width rear load deck (platform), traction bars on slope.
 1 1/2" Apitong full width
 Slot type tie downs on rear platform
 Ridewell air suspension
 Manual exhaust valve
 Tires - (8) 255/70R22.5 (H), 16 PR tubeless radials
 Hubs - Hub piloted with outboard drums
 Wheels - (8) 8.25 x 22.5 steel disc (white)
 Axles - 22,500 pounds with oil bearings
 Axle spacing - 50"
 Anti-Lock brakes (2S/2M System) .
 Brakes - 16 1/2" x 7" air
 Spring brakes - one (1) axle (rear axle)
 Automatic slack adjusters
 Lighting - L.E.D. type - rubber mounted - mid turn signal
 Finish - shot blast / epoxy primer / urethane finish
 Air lines - glad hands
 Electrical - 7 way receptacle
 Lashing rings - 10 (5 each side)
 Mud flaps
 Red and white conspicuity markings

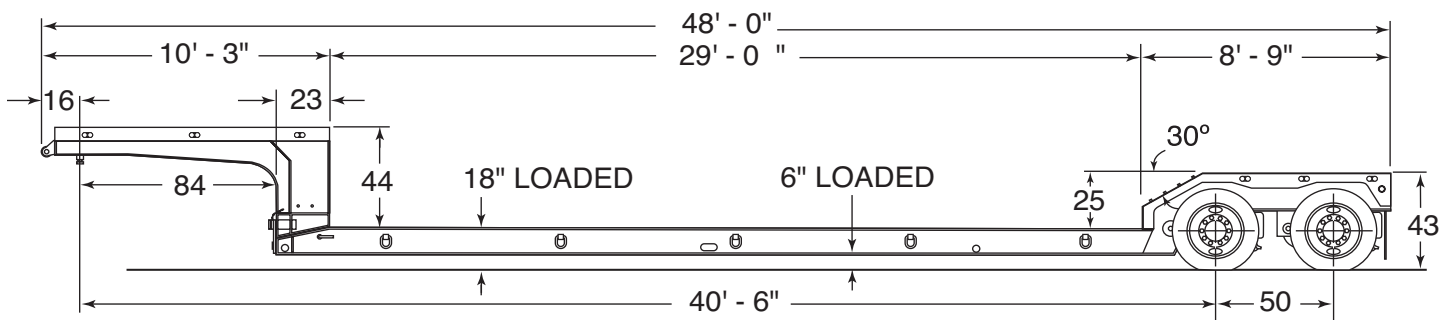

MRG30/35/40

Model	Capacity	Length	Axles	Tire Size	List Price	Wt. (Lbs.)
MRG35TD	35	48' - 0" OAL	2	255/70R22.5 (H)	\$91,156.00	115,100

35 tons (MRG35TD)		List Price	Est Wgt
X	Base Price	\$91,156.00	15,100
X	Tons Capacity - 35 tons in any 16'	\$0.00	0
X	Construction - (4) I-Beam, 12" deep, fully cambered, T-1	\$0.00	0
X	Platform width - 8'-6"	\$0.00	0
	Platform width - 9'-0"	\$1,100.00	300
	Platform width - 10'-0"	\$2,200.00	600
X	Platform length - 29'-0"	\$0.00	0
	Platform length - 31'-0"	\$1,200.00	700
	Platform length - 33'-0"	\$2,400.00	1,400
X	Platform Height/Road Clearance - 18"/6" loaded	\$0.00	0
X	Top flange reinforcement on front slope	\$0.00	0
X	Crossmembers spacing 8" I-beam on 24" centers	\$0.00	0
	Auxiliary crossmembers outside main beams between crossmembers	\$1,325.00	330
	Auxiliary crossmembers full width between crossmembers	\$1,850.00	450
X	Frame reinforcement - none	\$0.00	0
	Frame reinforcement for 3 closed couple axles only	\$3,500.00	700
X	Gooseneck - Full width-mechanical removable	\$0.00	0
	Tool box with lid in gooseneck (in drop/between mainbeams)	\$350.00	120
	Gooseneck - narrow	-\$950.00	-320
	Gooseneck - fixed	-\$1,700.00	-320
	Hydraulic system - wetline operations	\$0.00	0
	Hydraulic gooseneck - non ground engaging removable-hi lift	\$14,000.00	2,000
	Aluminum mudflaps - at rear of gooseneck	\$400.00	25
X	Gooseneck lock pin - mechanical viewable from the tractor	\$0.00	0
	Connections - air actuated gooseneck to deck locking pin	\$400.00	125
X	Fifth wheel height - 50" loaded	\$0.00	0
	Fifth wheel height - 49" & 47" double donut loaded	\$0.00	50
X	Swing clearance - 84"	\$0.00	0
	Swing clearance - 108"	\$500.00	500
X	Swing A-Way stirrups on gooseneck for detaching	\$0.00	0
	Gooseneck connections - pin & stirrups type w/ vertical locking pin	\$0.00	0

X	Slot type tie downs - tie downs slots on gooseneck	\$0.00	0
X	Full width rear deck - 1 1/2" apitong full width & traction bars up slope	\$0.00	0
	Boomwell - open bottom with no cover	\$2,600.00	0
	Boomwell - open bottom with cover	\$2,985.00	50
X	Platform tie down slots - tie down slots on rear platform	\$0.00	0
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$575.00	25
	Anti-lock brakes - 4S/2M (4 sensors/2 modulators)	\$960.00	75
X	Spring brakes on one axle	\$0.00	0
	Spring brakes on two axles	\$235.00	30
X	Axles - (2) 22,500# 5/8" wall	\$0.00	0
	Axles - (2) 25,000# 3/4" wall (per axle)	\$235.00	35
	Dust shields on all axles (per axle)	\$70.00	40
	Cam saver tubes on all axles (per axle)	\$300.00	20
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Suspension - Ridewell air ride with 50" axle spacing	\$0.00	0
	Suspension - Ridewell air ride with 55" axle spacing	\$325.00	120
	Suspension - Ridewell air ride with 60" axle spacing	\$1,000.00	300
	Liquid filled air gauge with chart	\$150.00	10
X	Manual exhaust valve on all axles	\$0.00	0
X	Tires - (8) 255/70R22.5 (H)	\$0.00	0
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111

X	Light - L.E.D. rubber sealed system	\$0.00	0
	Additional amber clearance lights (per pair up to 5 pairs)	\$110.00	5
X	Lash rings - (10) total, 5-per side	\$0.00	0
	Additional bent style lash rings (per lash ring)	\$50.00	5
	Additional flat style lash rings (per lash ring)	\$50.00	5
	Recessed lash rings (per recessed lash ring)	\$100.00	10
X	Decking - 1 1/2" Apitong, full width, butt joint	\$0.00	0
	Decking - 1 1/2" Apitong, open center, butt joint	-\$730.00	-500
	Decking securements with carriage bolts and floor clips	\$880.00	90
	Chain slots full length of deck	\$1,000.00	0
	Stake pockets (per stake pocket)	\$125.00	5
X	Extension brackets - none	\$0.00	0
	Extension brackets - 12" cast removable/swinging outriggers	\$1,500.00	280
	Outrigger planks - 2" x 10" apitong with spring tie downs	\$1,520.00	520
	Outrigger planks - 2" x 10" oak with spring tie downs	\$1,125.00	560
	Extruded aluminum pullouts with aluminum pullout on front approach and short face plate	\$21,000.00	1,400
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
	Additional Equipment		
	Aluminum storage baskets bolt-in - (per section)	\$175.00	20
	Air & electrical connections for future 3rd flip/removable axle (must have frame reinforcement)	\$575.00	160

60 or 65 ton Jeep		List Price	Est Wgt
	Base Price	\$59,635.00	7,680
X	Tons Capacity - proportionate share up to 60 tons	\$0.00	0
	Tons Capacity - proportionate share up to 65 tons	\$0.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
X	60" air operated sliding fifth wheel - 50" loaded	\$0.00	0
X	Swing clearance - 80"	\$0.00	0
X	Inner bridge - 14'-1"	\$0.00	0
X	Width - 8'-0"	\$0.00	0
	Width - 8'-6"	\$450.00	300
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$635.00	30
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$710.00	60
X	Spring brakes on one axle	\$0.00	0
X	Axles - (2) 25,000# 3/4" wall w/ limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all 2 axles	\$850.00	10
	Dust shields on both axles	\$140.00	40
	Cam saver tubes (per axle)	\$300.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (8) 275/70R22.5 (H)	\$0.00	0
	Tires - (8) 255/70R22.5 (H)	-\$400.00	-180
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55

	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$670.00	370
	Liquid filled air gauge with chart	\$150.00	10
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Mast for cables & hoses	\$0.00	0
X	Jumper cables & hoses included only for dolly to trailer connections	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Lash rings - (4) at balance points	\$0.00	0
X	Landing legs - 2-speed landing gear	\$0.00	0

Price Sheet No. C-DOL3-25 Effective October 1, 2025


All prices and specifications subject to change without notice. All prices exclusive of Federal Excise Tax, FOB Oregon, Illinois and subject to any other applicable taxes. All weights subject to a plus or minus of 5%. - U.S. Dollars.

JEEP DOLLIES
TRIPLE AXLE
75 Ton

STANDARD FEATURES AND EQUIPMENT

Capacity: Proportionate share of up to 75 tons
Minimum trailer gooseneck clearance radius - 216"
50" Tractor loaded 5th wheel height
80" Gooseneck clearance radius
Telescopic drop legs
50" Sliding 5th wheel height (loaded)
66" Sliding 5th wheel
Ridewell air suspension
Over-ride chains on three (3) axles
Raising & lowering valve
8'-0" (96") wide
Tires - 275/70R22.5 (H) 16 PR tubeless radials
Wheels - 8.25 x 22.5 single piece steel disc (white)

Hubs - Hub piloted with outboard drums
Axles - 25,000# (3/4" wall thickness) with oil bearings
Brakes - 16 1/2" x 7" full air
Spring brakes - one (1) axle (center axle)
Anti-Lock brakes - None
Automatic slack adjusters
Mast for cable and hoses
Jumper cable and hoses
Lighting - L.E.D. type - rubber mounted - mid turn signal
Finish - shot blast / epoxy primer / urethane finish
Air lines - glad hands
Electrical - 7 way receptacle and plug
Lash rings - 4 at balance point
Mud flaps
Red and white conspicuity markings

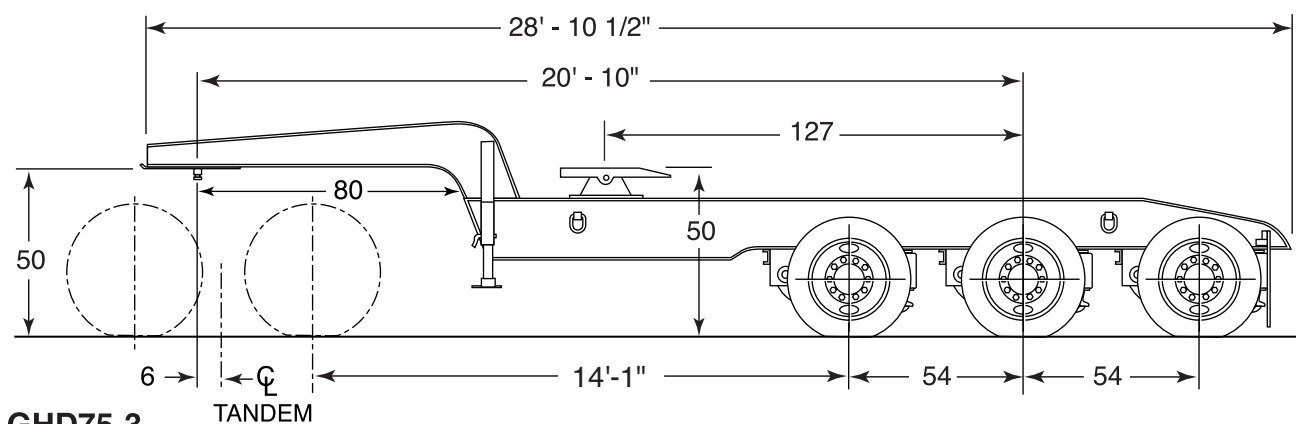

GHD75-3

Model
GHD75T3

Capacity
75 Tons
(proportionate share)

Tire Size
275/70R22.5 (H)

Inner Bridge
14'-1"

Axles
3

Weight(lbs.)
11,930lbs.

75 ton Jeep		List Price	Est Wgt
	Base Price	\$77,865.00	11,930
X	Tons Capacity - proportionate share up to 75 tons	\$0.00	0
X	Fifth wheel height - 50" loaded	\$0.00	0
X	60" air operated sliding fifth wheel - 50" loaded	\$0.00	0
X	Swing clearance - 80"	\$0.00	0
X	Inner bridge - 14'-1"	\$0.00	0
X	Width - 8'-0"	\$0.00	0
	Width - 8'-6"	\$550.00	300
X	Air brakes - 16.5" x 7" with auto slacks & outboard drums	\$0.00	0
X	Anti-lock brakes - none (trailer GVWR exceeds 120,000#)	\$0.00	0
	Anti-lock brakes - 2S/1M (2 sensors/1 modulator)	\$635.00	30
	Anti-lock brakes - 2S/2M (2 sensors/2 modulators)	\$710.00	60
X	Spring brakes on one axle	\$0.00	0
X	Axles - (3) 25,000# 3/4" wall w/ limit chains	\$0.00	0
	Tire inflation system - P.S.I. on all axles	\$1,275.00	10
	Dust shields on all axles	\$210.00	40
	Cam saver tubes all axles	\$900.00	10
	Hubodometer on driver side of 1st axle	\$100.00	10
X	Tires - (12) 275/70R22.5 (H)	\$0.00	0
	Tires - (12) 255/70R22.5 (H) (per axle)	-\$200.00	-180
X	Wheels - steel disc, 10 hole, hub piloted, 8.25" x 22.5"	\$0.00	0
	Accuride aluminum wheels - extra polished outers, standard polished inners (per axle)	\$1,250.00	-110
	Wheels - Accuride extra polished outers, steel disc inners (per axle)	\$685.00	-55
	Accuride aluminum wheels - accushield outers, standard polished inners (per axle)	\$1,650.00	-166
	Wheels - accushield outers, steel disc inners (per axle)	\$1,085.00	-111
	Alcoa aluminum wheels - Polished outers, machine finish inners (per axle)	\$1,750.00	-110
	Wheels - Alcoa polished outers, steel disc inners (per axle)	\$1,185.00	-55
	Alcoa aluminum wheels - Dura-Brite outers, machine finish inners (per axle)	\$2,150.00	-166
	Wheels - Dura-Brite outers, steel disc inners (per axle)	\$1,585.00	-111
X	Suspension - air ride with 55" axle spacing	\$0.00	0
	Suspension - air ride with 60.5" axle spacing	\$1,005.00	370
	Liquid filled air gauge with chart	\$150.00	10
X	Raising and lowering valve at rear of trailer	\$0.00	0
X	Mast for cables & hoses	\$0.00	0



X	Jumper cables & hoses included only for dolly to trailer connections	\$0.00	0
X	Light - L.E.D. rubber sealed system	\$0.00	0
X	Paint - Gloss Black	\$0.00	0
	Paint - Etnyre Red	\$0.00	0
	Paint - Etnyre Signal Yellow	\$0.00	0
	Paint - Etnyre White	\$0.00	0
	Paint - Etnyre Mission Gray	\$0.00	0
	Paint - Bearcat Orange	\$0.00	0
	Paint - Non metallic upgrade paint (see Etnyre color selector)	\$3,000.00	0
	Paint - Non metallic custom paint (not on Etnyre color selector)	\$10,000.00	0
X	Lash rings - (4) at balance points	\$0.00	0
X	Landing legs - 2-speed landing gear	\$0.00	0

Tandem Axle

Make _____

Model _____ **Tire Size** _____

NOTE: "L" is farthest point from center of fifth wheel (edge of tire, fender, corner of frame, etc.)

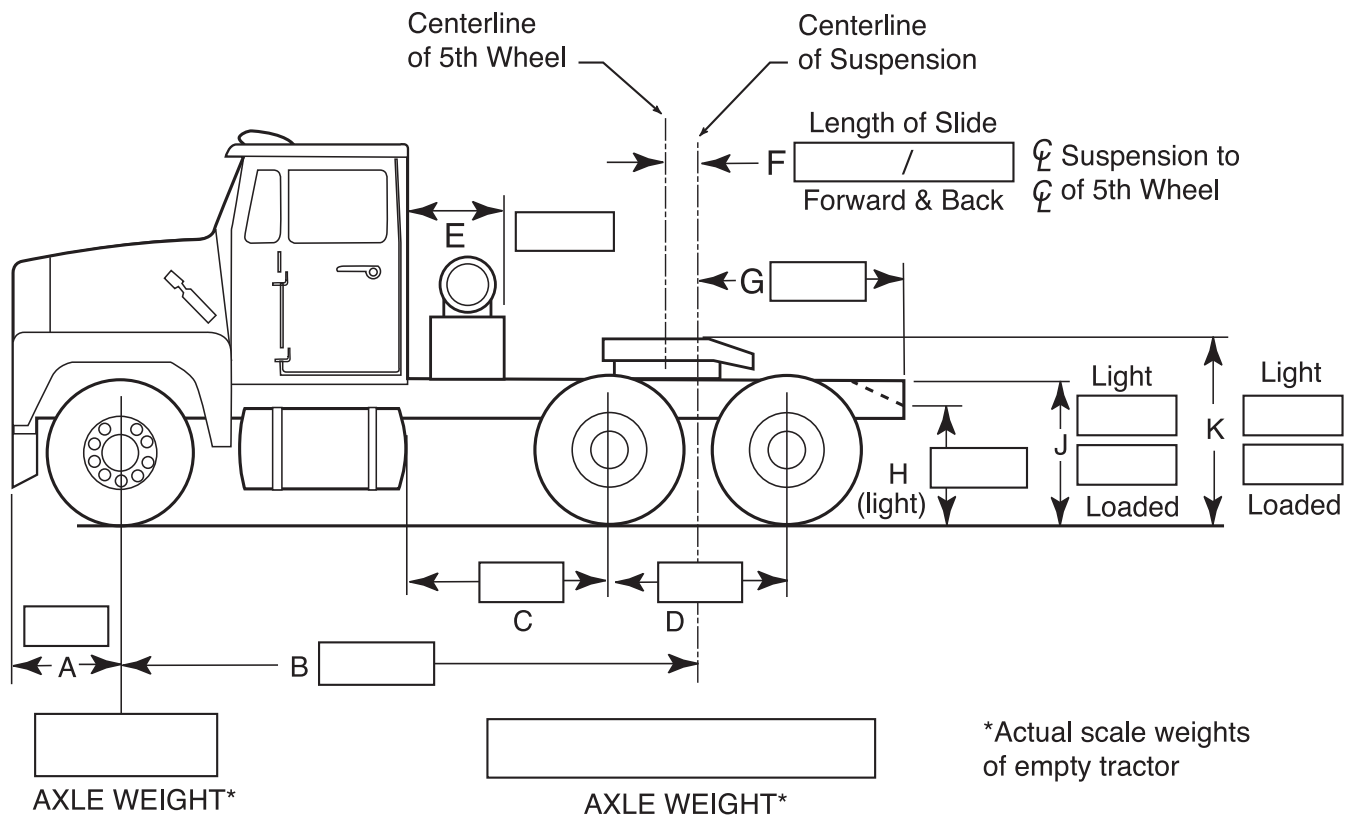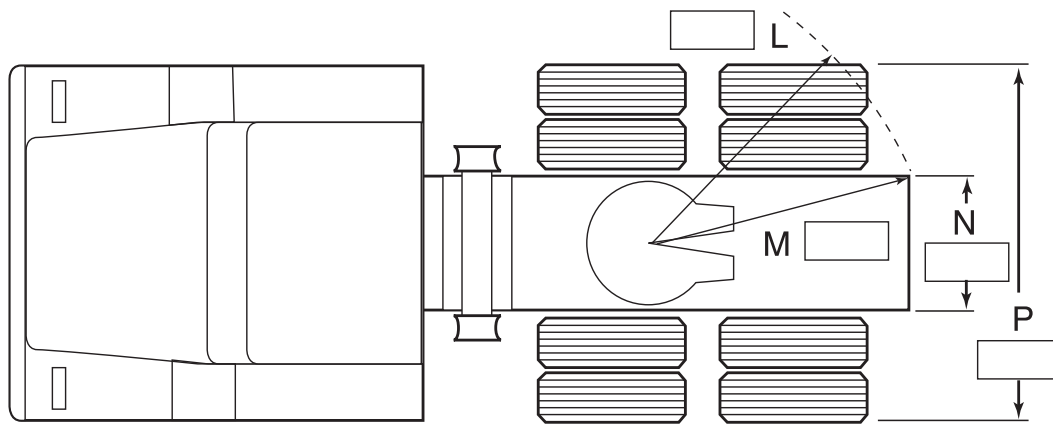

All dimension boxes must be filled in.
For weight distribution drawings, axle weights must be filled in.

Truck Tractor Dimensions



Tri Axle

Make _____

Model _____

Tire Size _____

NOTE: "L" is farthest point from center of fifth wheel (edge of tire, fender, corner of frame, etc.)

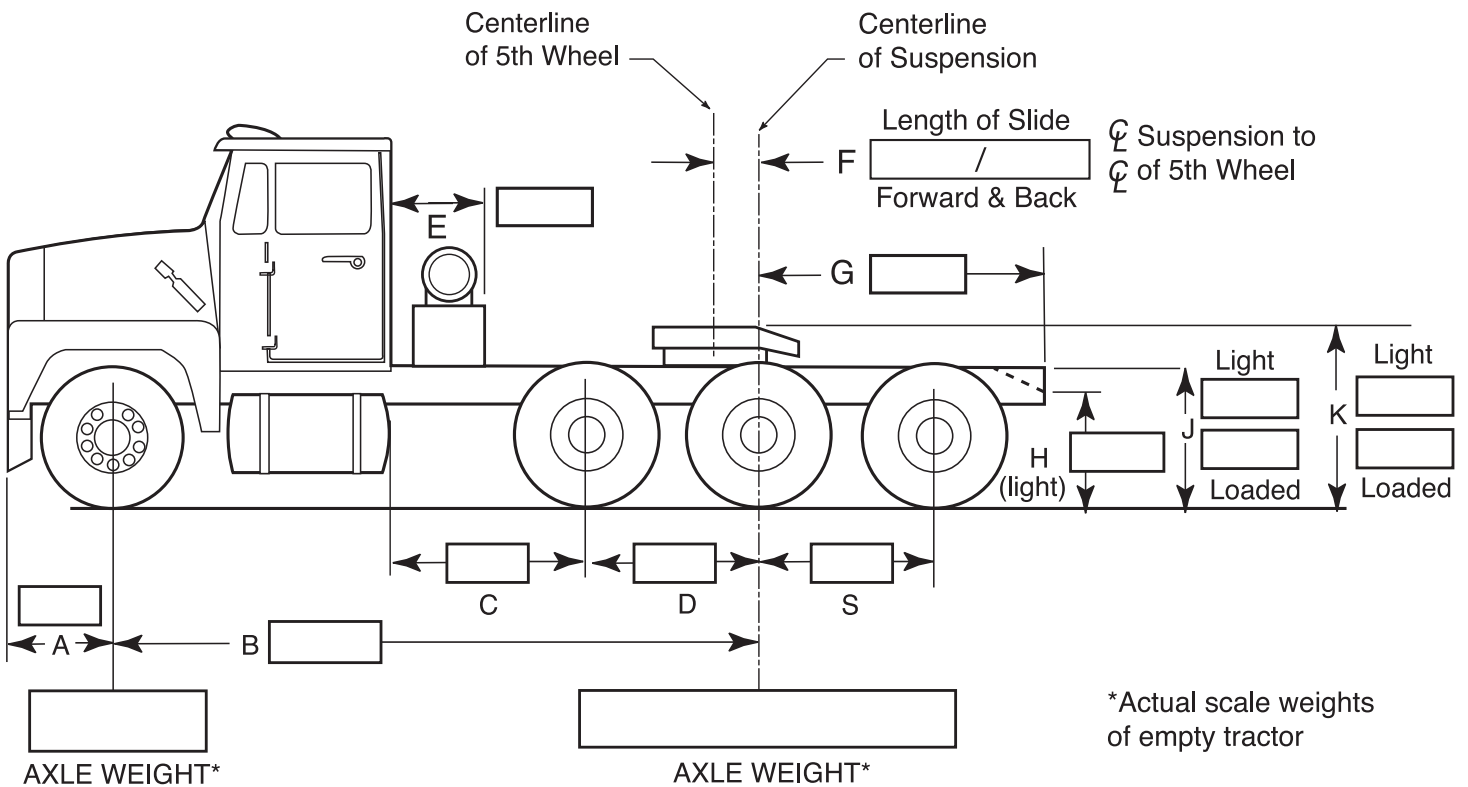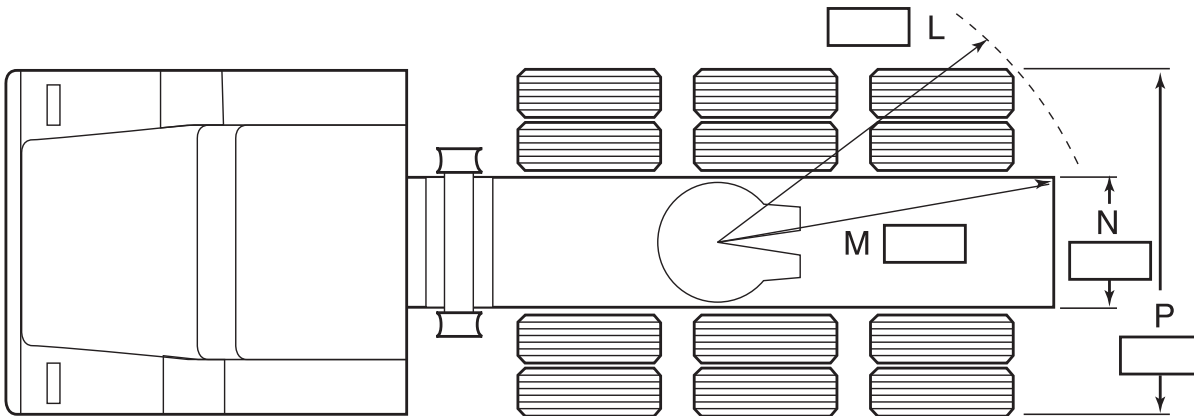

All dimension boxes must be filled in.
For weight distribution drawings, axle weights must be filled in.



ETNYRE INTERNATIONAL

1333 South Daysville Road

Oregon, Illinois 61061

Phone: 815-732-2116

800-995-2116

Email: sales@etnyre.com

Website: www.etnyre.com